

# Catalogue **BUROTICA**



Organization | Planning | Customization




# **BUROTICA**

Floor Boxes	<b>4</b>
Workstations	<b>6</b>
Desktop Workstations	<b>8</b>
Minicolumns	<b>10</b>
Columns	<b>10</b>
Mec Q45 System	<b>12</b>
Technical Information	<b>15</b>












## Floor Boxes

NEW



In constantly evolving work environments, we have designed solutions for a multiplicity of requirements. Whether they are **solutions for new workspaces** or **reconfiguration of existing ones**.

**Floor Boxes**

		Ref.	Colour
	<p><b>Floor Box - 4 Modules</b>                      External dimensions (mm): ø 139                      Supplied with separate claws  <a href="#">See Technical Data Sheet - page 16</a></p>	<b>83002 C</b>	CZ AT BR
	<p><b>Flush Mounting Box for Floor Box - 4 Modules</b>                      Supplied with assembled claws</p>	<b>83052</b>	–
	<p><b>Floor Box - 8 Modules</b>                      External dimensions (mm): 256 x 166                      Supplied with assembled claws  <a href="#">See Technical Data Sheet - page 17 to 18</a></p>	<b>NEW</b> <b>83004 C</b>	CZ AT
	<p><b>Flush Mounting Box for Floor Box - 8 Modules</b>                      Supplied with Polystyrene Block</p>	<b>NEW</b> <b>83054</b>	–
	<p><b>Floor Box - 12 Modules</b>                      External dimensions (mm): 256 x 211                      Supplied with assembled claws  <a href="#">See Technical Data Sheet - page 17 to 18</a></p>	<b>NEW</b> <b>83006 C</b>	CZ AT
	<p><b>Flush Mounting Box for Floor Box - 12 Modules</b>                      Supplied with Polystyrene Block</p>	<b>NEW</b> <b>83056</b>	–
	<p><b>Floor Box - 16 Modules</b>                      External dimensions (mm): 256 x 256                      Supplied with assembled claws  <a href="#">See Technical Data Sheet - page 17 to 18</a></p>	<b>83008 C</b>	CZ AT
	<p><b>Floor Box with Stainless Steel Cover - 16 Modules</b>                      External dimensions (mm): 256 x 256                      Supplied with assembled claws  <a href="#">See Technical Data Sheet - page 17 to 18</a></p>	<b>83008 C</b>	ZI AI
	<p><b>Flush Mounting Box for Floor Box - 16 Modules</b>                      Supplied with Polystyrene Block</p>	<b>83058</b>	–
	<p><b>Floor Box - 24 Modules</b>                      External dimensions (mm): 256 x 369                      Supplied with assembled claws  <a href="#">See Technical Data Sheet - page 17 to 18</a></p>	<b>NEW</b> <b>83012 C</b>	CZ AT
	<p><b>Flush Mounting Box for Floor Box - 24 Modules</b>                      Supplied with Polystyrene Block</p>	<b>NEW</b> <b>83062</b>	–

C - Complete Device. | BR - White; CZ - Grey; AT - Anthracite; ZI - Grey/Inox; AI - Anthracite/Inox.  
 Applicable with MEC Q45 devices.

## Workstations



New Colours















We develop solutions that merge into the decoration and aesthetics of existing spaces, respecting their identity.

Its modularity and exchange of customised solutions allow **quick adaptation and reconfiguration in any workspace.**

**Know our solutions and new colours.**


**Workstations**

FLUSH MOUNTING		Ref.	Colour
	<p><b>Workstation Flush Mounting - 2 x 4 Modules</b>                      External dimensions (mm): 185 x 170 x 50  <a href="#">See Technical Data Sheet - page from 22 to 23</a></p>	<b>83401 S</b>	
	<p><b>Workstation Flush Mounting - 3 x 4 Modules</b>                      External dimensions (mm): 245 x 170 x 50  <a href="#">See Technical Data Sheet - page from 22 to 23</a></p>	<b>83402 S</b>	BR BM PM AL
	<p><b>Workstation Flush Mounting - 4 x 4 Modules</b>                      External dimensions (mm): 305 x 170 x 50  <a href="#">See Technical Data Sheet - page from 22 to 23</a></p>	<b>83403 S</b>	
	<p><b>Workstation Flush Mounting 3x4 Modules with 2 Schuko VM + 2 Schuko BR + 2 RJ</b>                      External dimensions (mm): 245 x 170 x 50                      Supplied without connectors  <a href="#">See Technical Data Sheet - page from 22 to 23</a></p>	<b>83402 C</b>	
	<p><b>Workstation Flush Mounting 3x4 Modules with 2 French Socket VM + 2 French Socket BR + 2 RJ</b>                      External dimensions (mm): 245 x 170 x 50                      Supplied without connectors  <a href="#">See Technical Data Sheet - page from 22 to 23</a></p>	<b>83431 C</b>	BR
	<p><b>Workstation Flush Mounting with Door - 2 x 8 Modules</b>                      External dimensions (mm): 260 x 260 x 64  <a href="#">See Technical Data Sheet - page from 24 to 25</a></p>	<b>83404 S</b>	BR
SURFACE MOUNTING			
	<p><b>Workstation Surface Mounting - 2 x 4 Modules</b>                      External dimensions (mm): 187 x 172 x 60  <a href="#">See Technical Data Sheet - page 20 to 21</a></p>	<b>83411 S</b>	
	<p><b>Workstation Surface Mounting - 3 x 4 Modules</b>                      External dimensions (mm): 247 x 172 x 60  <a href="#">See Technical Data Sheet - page 20 to 21</a></p>	<b>83412 S</b>	
	<p><b>Workstation Surface Mounting - 4 x 4 Modules</b>                      External dimensions (mm): 307 x 172 x 60  <a href="#">See Technical Data Sheet - page 20 to 21</a></p>	<b>83413 S</b>	BR BM PM AL
	<p><b>Workstation Surface Mounting - 2 x 4 + 4 x 4 Modules</b>                      External dimensions (mm): 217 x 202 x 60  <a href="#">See Technical Data Sheet - page 19 and 21</a></p>	<b>83410 S</b>	
	<p><b>Workstation Surface Mounting 2x4 + 4x4 Modules with 2 Schuko VM + 2 Schuko BR + 2 RJ</b>                      External dimensions (mm): 217 x 202 x 60                      Supplied without connectors  <a href="#">See Technical Data Sheet - page 19 and 21</a></p>	<b>83410 C</b>	
	<p><b>Workstation Surface Mounting 2x4 + 4x4 Modules with 2 French Socket VM + 2 French Socket BR + 2 RJ</b>                      External dimensions (mm): 217 x 202 x 60                      Supplied without connectors  <a href="#">See Technical Data Sheet - page 19 and 21</a></p>	<b>83441 C</b>	BR
ACCESSORIES			
	<p><b>MODUS 55 Adapter for Workstations</b>                      4 Modules</p>	<b>83420</b>	
	<p><b>Lid for Trunking Access to Workstations</b>                      Supplied as a Blind Cover of 4 modules.</p>	<b>83421</b>	

C - Complete Device, S - Semi-assembled | BR - White; BM - Matte White; PM - Matte Black; AL - Aluminium  
 Applicable with MEC Q45 devices.

## Desktop Workstations



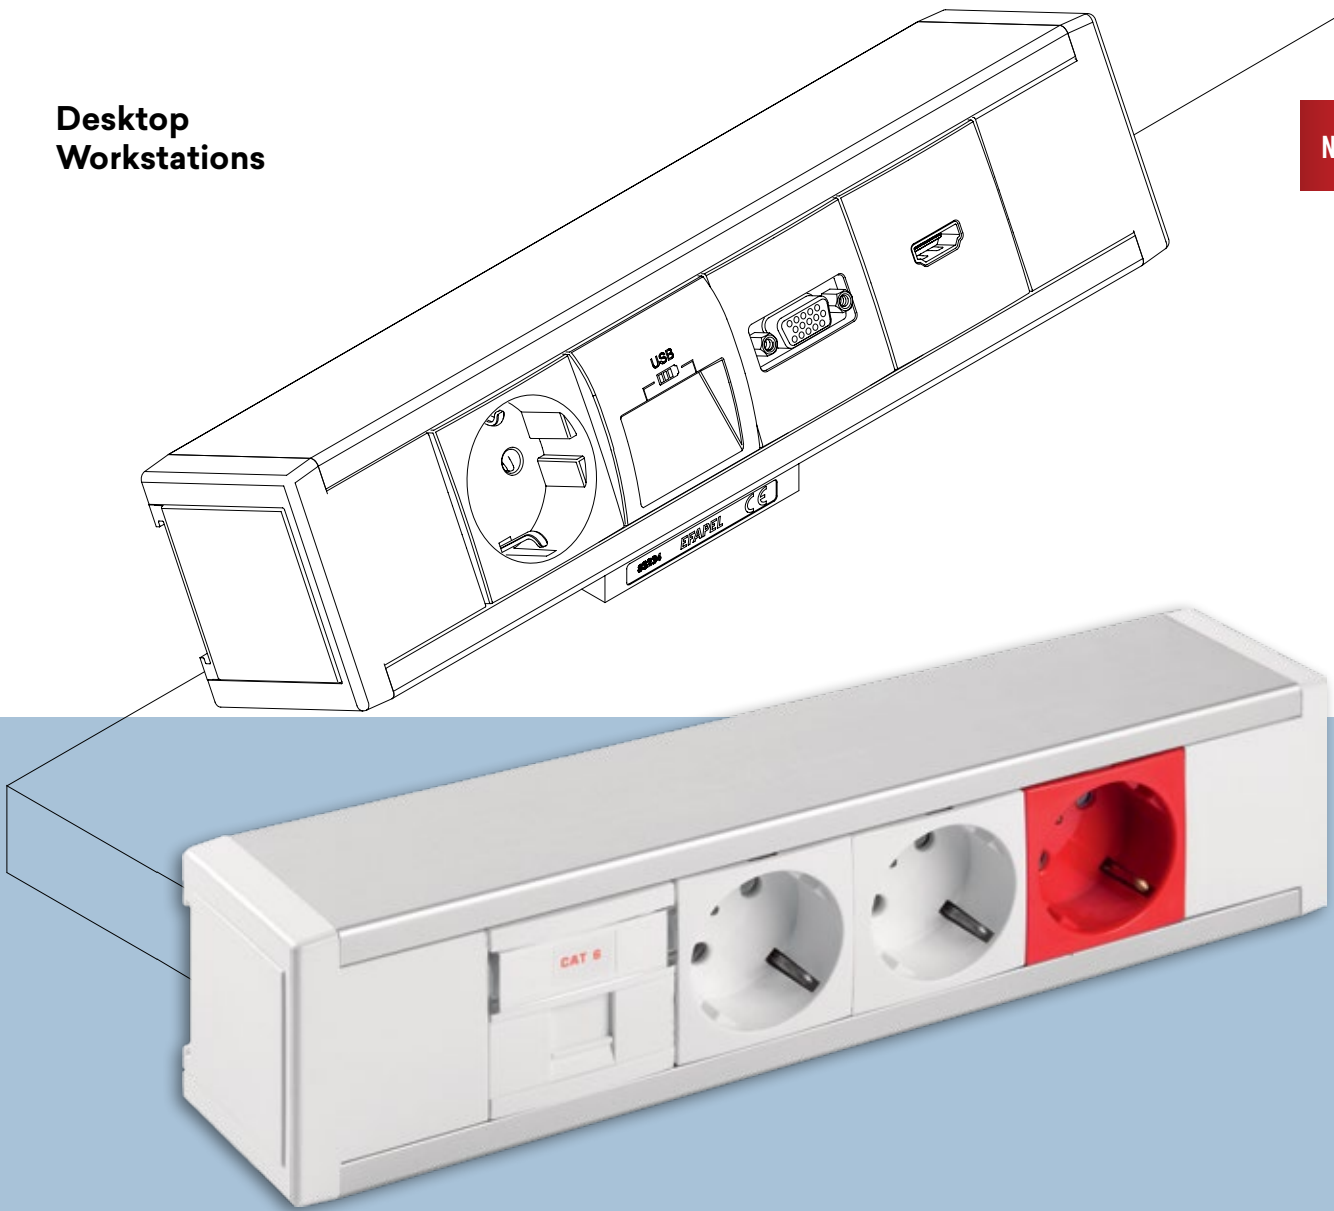















NEW



Easy and practical access to all your connection and connectivity needs.


**Easy to apply, versatile and configurable,**  
Adapted to the new requirements in **workspaces.**

**Desktop Workstations**

		Ref.	Colour
	<b>Desktop Workstation - 8 + 2 Modules</b> Aluminium. Supplied with 4 Positioners (Ref. 45992) Supplied with 1 Blind Cover Plate (Ref. 45677 S) <a href="#">See Technical Data Sheet - page 26 to 28</a>	<b>83201 S</b>	
	<b>Desktop Workstation - 12 + 2 Modules</b> Aluminium. Supplied with 6 Positioners (Ref. 45992) Supplied with 1 Blind Cover Plate (Ref. 45677 S) <a href="#">See Technical Data Sheet - page 26 to 28</a>	<b>83202 S</b>	BR
<b>ACCESSORIES</b>			
	<b>Top with Adapter for Desktop Workstation - 2 Modules</b>	<b>83230 A</b>	
	<b>Cable Entry Top for Desktop Workstations - 2 Modules</b>	<b>83231 A</b>	
	<b>Module for Fast Connector 2P + T - 2 Modules</b>	<b>NEW</b> <b>45980 S</b>	BR
	<b>Double Module for 2 Fast Connectors 2P + T - 2 Modules</b>	<b>NEW</b> <b>45981 S</b>	
	<b>Fast Connector 2P + T Male for Wiring</b> <a href="#">See Technical Data Sheet - page 34</a>	<b>NEW</b> <b>83150</b>	
	<b>Fast Connector 2P + T Female for Wiring</b> <a href="#">See Technical Data Sheet - page 34</a>	<b>NEW</b> <b>83151</b>	
	<b>Fast Connector 2P + T Male for Panel</b> <a href="#">See Technical Data Sheet - page 34</a>	<b>NEW</b> <b>83152</b>	PT VM
	<b>Fast Connector 2P + T Female for Panel</b> <a href="#">See Technical Data Sheet - page 34</a>	<b>NEW</b> <b>83153</b>	
	<b>Derivation 1 Input / 3 Outputs</b> <a href="#">See Technical Data Sheet - page 34</a>	<b>NEW</b> <b>83154</b>	
	<b>90° Positioner for 2 Modules</b> Applicable with MEC Q45 devices in Desktop Workstations, Minicolumns and Columns. Enables device assembly with 90° rotation.	<b>45992</b>	
	<b>Cable Gland 3G 1,5 mm</b>	<b>81191</b>	
	<b>Cable Gland 3G 2,5 mm</b>	<b>81192</b>	
	<b>MODUS 55 Adapter for Desktop Workstation, Minicolumns and Columns</b> 4 Modules 2 Poles (for 2 modules devices)	<b>NEW</b> <b>83220</b>	
	<b>Desktop Workstation Fixing Kit</b>	<b>NEW</b> <b>83234</b>	-
	<b>Desktop Workstation Profile</b> Dimensions (mm): 2100 / emb. Aluminium. Supplied with Cover (Ref. 83233)	<b>83232</b>	
	<b>Cover for Profile</b> Dimensions (mm): 2100	<b>83233</b>	

S - Semi-assembled. | BR - White; PT - Black; VM - Red.  
Applicable with MEC Q45 devices.

**Minicolumns  
and Columns**

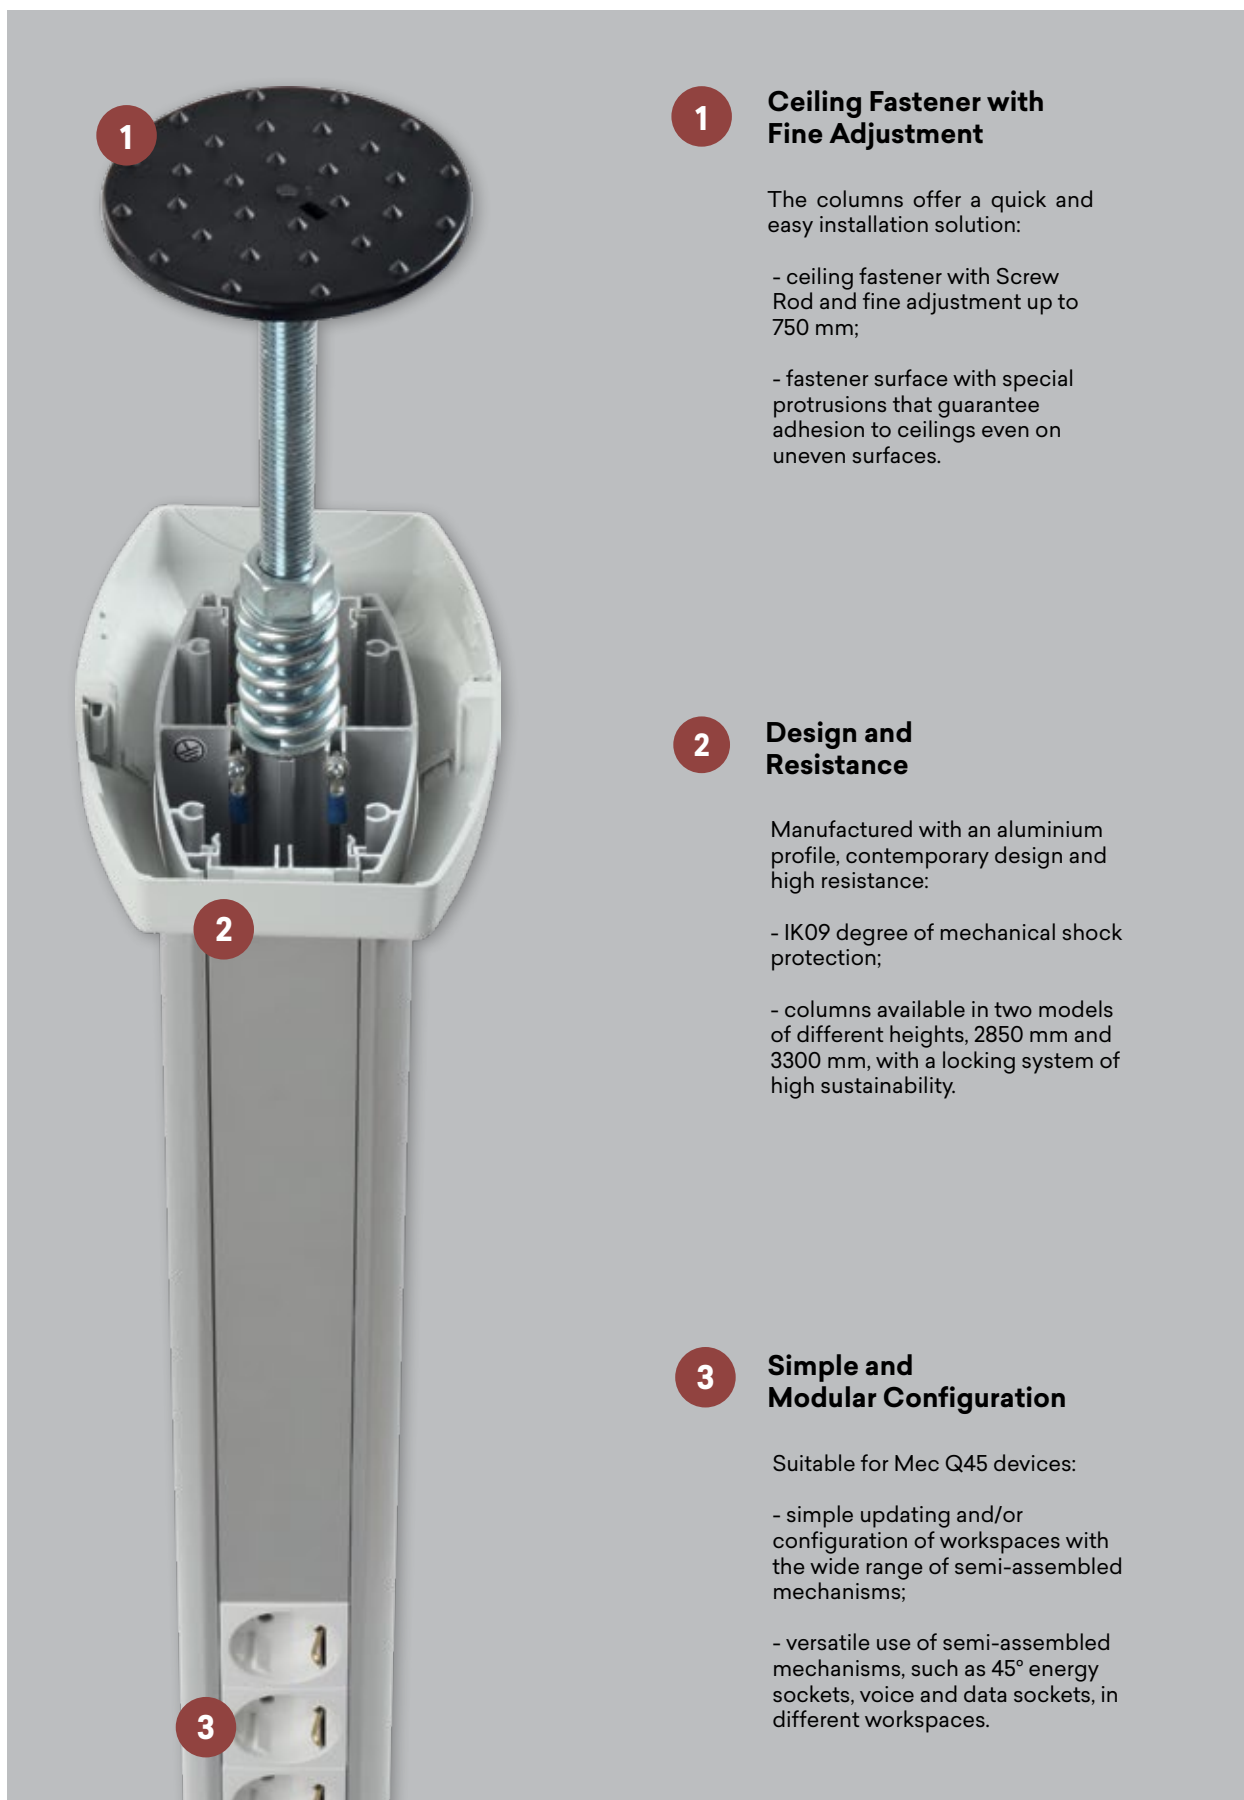

**1**

**Ceiling Fastener with Fine Adjustment**

The columns offer a quick and easy installation solution:

- ceiling fastener with Screw Rod and fine adjustment up to 750 mm;
- fastener surface with special protrusions that guarantee adhesion to ceilings even on uneven surfaces.

**2**

**Design and Resistance**

Manufactured with an aluminium profile, contemporary design and high resistance:

- IK09 degree of mechanical shock protection;
- columns available in two models of different heights, 2850 mm and 3300 mm, with a locking system of high sustainability.


**3**

**Simple and Modular Configuration**


Suitable for Mec Q45 devices:

- simple updating and/or configuration of workspaces with the wide range of semi-assembled mechanisms;
- versatile use of semi-assembled mechanisms, such as 45° energy sockets, voice and data sockets, in different workspaces.

**Minicolumns**









	Ref.	Colour	
	<b>2-Sided Minicolumn 12 + 12 Modules</b> Aluminium. Height (mm): 340 Supplied with Top for Minicolumn (Ref. 83290 A) and Base for Minicolumn (Ref. 83251 A) in CZ (Grey) <a href="#">See Technical Data Sheet - page 29 to 30 and page 33</a>	<b>83282</b>	
	<b>2-Sided Minicolumn 18 + 18 Modules</b> Aluminium Height (mm): 480 Supplied with Top for Minicolumn (Ref. 83290 A) and Base for Minicolumn (Ref. 83251 A) in CZ (Grey) <a href="#">See Technical Data Sheet - page 29 to 30 and page 33</a>	<b>83281</b>	–
	<b>2-Sided Minicolumn 28 + 28 Modules</b> Aluminium. Height (mm): 710 Supplied with Top for Minicolumn (Ref. 83290 A) and Base for Minicolumn (Ref. 83251 A) in CZ (Grey) <a href="#">See Technical Data Sheet - page 29 to 30 and page 33</a>	<b>83283</b>	

**Columns**

	<b>2-Sided Column - 2850 mm</b> Aluminium Supplied with Top for Column (Ref. 83250 A) and Base for Column (Ref. 83251 A) in CZ (Grey) and Screw Rod (Ref. 83252 A) <a href="#">See Technical Data Sheet - page 31 to 33</a>	<b>83241</b>	
	<b>2-Sided Column - 3300 mm</b> Aluminium Supplied with Top for Column (Ref. 83250 A) and Base for Column (Ref. 83251 A) in CZ (Grey) and Screw Rod (Ref. 83252 A) <a href="#">See Technical Data Sheet - page 31 to 33</a>	<b>83242</b>	–

**Minicolumns and Columns**

*ACCESSORIES*

	<b>MODUS 55 Adapter for Desktop Workstation, Minicolumns and Columns</b> 4 Modules 2 Poles (for 2 modules devices)	<b>83220</b>	–
	<b>90° Positioner for 2 Modules</b> Applicable with MEC Q45 devices in Desktop Workstations, Minicolumns and Columns. Enables device assembly with 90° rotation.	<b>45992</b>	
	<b>Top for Column</b>	<b>83250 A</b>	
	<b>Base for Column/Minicolumn</b>	<b>83251 A</b>	CZ AL
	<b>Top for Minicolumn</b>	<b>83290 A</b>	
	<b>Screw Rod</b> Dimensions (mm): 1000 M16	<b>83252 A</b>	
	<b>Profile for Column/Minicolumn - 2 sides - 3180 mm</b> Supplied with 2 Covers	<b>83253</b>	–
	<b>Covers for Profile</b> Dimensions (mm): 2100	<b>83233</b>	

A - Accessory. | CZ - Grey; AL - Aluminium.  
 Applicable with MEC Q45 devices.

**MEC Q45**  
System

Switchgear and sockets system, which allows easy assembly and a simple choice of functions.



Control Devices	
	Ref. Colour
Single Pole Switch - 2 Modules	45011 S
Single Pole Switch - 1 Module	45010 S
Single Pole Switch with Orienting Light - 2 Modules	45012 S
Single Pole Switch with Orienting Light - 1 Module	45015 S
Single Pole Switch with Pilot Lamp - 2 Modules	45013 S
Single Pole Switch with Pilot Lamp - 1 Module	45016 S
Two-pole Switch - 2 Modules	45021 S
Two-pole Switch - 1 Module	45020 S
Two-pole Switch with Pilot Lamp - 2 Modules	45023 S
Two-pole Switch with Pilot Lamp - 1 Module	45026 S
One Circuit Digital Time Switch - 2 Modules	45041 S
Two Circuits Digital Time Switch - 2 Modules	45042 S
Card-System Timer Switch - 2 Modules	45033 S
Timer Switch - 2 Modules	45040 S
Two Circuits Switch - 2 Modules	45061 S
Two-way Switch - 2 Modules	45071 S
Two-way Switch - 1 Module	45070 S
Two-way Switch with Orienting Light - 2 Modules	45072 S
Two-way Switch with Orienting Light - 1 Module	45074 S
Two-way Switch with Pilot Lamp - 2 Modules	45073 S
Two-way Switch with Pilot Lamp - 1 Module	45076 S
Two-pole Two-way Switch - 2 Modules	45077 S
Intermediate Switch - 2 Modules	45051 S
Intermediate Switch - 1 Module	45050 S
Intermediate Switch with Orienting Light - 2 Modules	45052 S
Intermediate Switch with Orienting Light - 1 Module	45053 S
Rocker Push-button - 2 Modules	45151 S
Rocker Push-button - 1 Module	45161 S
Rocker Push-button (NO + NC) - 2 Modules	45150 S
Rocker Push-button (NO + NC) - 1 Module	45166 S
Rocker Push-button with Bell Symbol - 2 Modules	45177 S
Rocker Push-button with Bell Symbol - 1 Module	45167 S
Rocker Push-button with Lamp Symbol - 2 Modules	45179 S
Rocker Push-button with Lamp Symbol - 1 Module	45169 S

BR  
BM PM AL

S - Semi-assembled | BR - White; BM - Matte White; PM - Matte Black; AL - Aluminium.

<b>Control Devices</b>		
	<b>Ref.</b>	<b>Colour</b>
Rocker Push-button with Orienting Light (250 V ~) - 2 Modules	<b>45152 S</b>	
Rocker Push-button with Orienting Light (250 V ~) - 1 Module	<b>45160 S</b>	
Rocker Push-button with Orienting Light (12 V) - 2 Modules	<b>45162 S</b>	
Rocker Push-button with Orienting Light (12 V) - 1 Module	<b>45163 S</b>	
Rocker Push-button with Independent Pilot Lamp (250 V ~) - 2 Modules	<b>45154 S</b>	
Rocker Push-button with Independent Pilot Lamp (250 V ~) - 1 Module	<b>45153 S</b>	
Rocker Push-button with Independent Pilot Lamp (12 V) - 2 Modules	<b>45158 S</b>	
Rocker Push-button with Independent Pilot Lamp (12 V) - 1 Module	<b>45157 S</b>	
Rocker Push-button with Orienting Light with Lamp Symbol - 2 Modules	<b>45172 S</b>	
Rocker Push-button with Orienting Light with Lamp Symbol - 1 Module	<b>45171 S</b>	
Double Rocker Push-button Switch - 2 Modules	<b>45156 S</b>	
Rocker Push-button / Two-way Switch - 2 Modules	<b>45159 S</b>	
Electronic Very Low Tension 4-Gang Push-button - 2 Modules	<b>45164 S</b>	
Rotary Switch - 2 Modules	<b>45302 S</b>	
Rotary Two-way Switch - 2 Modules	<b>45301 S</b>	BR BM PM AL
Key Lock Two-way Switch - 2 Modules	<b>45352 S</b>	
Key Lock Push-button Switch - 2 Modules	<b>45351 S</b>	
Two-way Pull Cord Switch - 2 Modules	<b>45092 S</b>	
Push-button Pull Cord Switch (NO + NC) - 2 Modules	<b>45090 S</b>	
Electric Shutters Switch - 2 Modules	<b>45293 S</b>	
Electric Shutters Switch with Mechanical Blockage - 2 Modules	<b>45295 S</b>	
Double Push-button for Electric Shutters - 2 Modules	<b>45281 S</b>	
Double Push-button Switch for Electric Shutters Control for Multiple Points - 2 Modules	<b>45283 S</b>	
Rotary Two-way Switch for Electric Shutters - 2 Modules	<b>45305 S</b>	
Rotary Push-Button for Electric Shutters - 2 Modules	<b>45303 S</b>	
General Control Module with IR Sensor for Electric Shutters - 2 Modules	<b>45311 S</b>	
Local Control Module with IR Sensor for Electric Shutters - 2 Modules	<b>45312 S</b>	
RLC Rotary Dimmer - 2 Modules	<b>45216 S</b>	
RLC Dimmer Press Switch - 2 Modules	<b>45218 S</b>	

<b>Motion Detectors</b>		
Motion Detector 1000 W - 2 Modules	<b>45401 S</b>	
Motion Detector 400 W - 2 Modules	<b>45402 S</b>	
Motion Detector - Wall Installation 1000 W - 2 Modules	<b>45403 S</b>	BR BM PM AL
Motion Detector - Wall Installation 400 W - 2 Modules	<b>45404 S</b>	

S - Semi-assembled | BR - White; BM - Matte White; PM - Matte Black; AL - Aluminium; IC - Colorless; LR - Orange; VD - Green; VM - Red.

<b>Temperature Control</b>		
	<b>Ref.</b>	<b>Colour</b>
Rotary Thermostat - 2 Modules	<b>45234 S</b>	
Multifunctional Thermostat - 2 Modules	<b>45236 S</b>	BR BM PM AL
Multifunctional Chronothermostat - 2 Modules	<b>45235 S</b>	
Floor Probe for Thermostat and Chronothermostat	<b>81950</b>	-

<b>Orientation and Light Indicators</b>		
LED Pilot Light - 1 Module	<b>NEW</b> <b>45360 S</b>	IC VD VM LR
Light Indicator - 2 Modules	<b>45361 S</b>	
Double LED Pilot Light Green/Red - 1 Module	<b>NEW</b> <b>45363 S</b>	
LED Pilot Light 2 State Green/Red - 2 Modules	<b>NEW</b> <b>45365 S</b>	-
LED Pilot Light 2 State Green/Red - 1 Module	<b>NEW</b> <b>45364 S</b>	
Triangular Pilot Light 2 State Green/Red - 2 Modules	<b>NEW</b> <b>45366 S</b>	
Triangular Overdoor Light Indicator - 2 Modules	<b>45362 S</b>	IC VD VM LR
LED Pilot Light 2 State Green/Red - Red 12-24 V - 2 Modules	<b>NEW</b> <b>45368 S</b>	-
LED Pilot Light 2 State Green/Red - Red 12-24 V - 1 Module	<b>NEW</b> <b>45367 S</b>	
White Orientation Light - 2 Modules	<b>45388 S</b>	
White Orientation Light with Battery - 2 Modules	<b>45389 S</b>	BR BM PM AL
Electronic Buzzer - 1 Module	<b>45369 S</b>	

<b>Data, Voice and Image Sockets</b>		
USB Data Socket - 1 Module	<b>45437 S</b>	
HDMI Socket with Screw Connection - 1 Module	<b>45435 S</b>	
HDMI Socket with Screw Connection - 2 Modules	<b>45436 S</b>	
Female HD15 VGA Socket - 2 Modules	<b>45430 S</b>	
Female RCA Socket 3 Outputs - 1 Module	<b>45580 S</b>	
Module with RJ45 Connector Cat. 6A UTP - 1 Module	<b>45440 S</b>	
Module with RJ45 Connector Cat. 6 UTP - 1 Module	<b>45978 S</b>	
Module with RJ45 Connector Cat. 5e UTP - 1 Module	<b>45975 S</b>	BR BM PM AL
Module with RJ11 Connector Cat. 3 - 1 Module	<b>45972 S</b>	
Module with RJ45 Connector Cat. 6A STP - 1 Module	<b>NEW</b> <b>45987 S</b>	
Module with RJ45 Connector Cat. 6 STP - 1 Module	<b>45988 S</b>	
Module with RJ45 Connector Cat. 5e STP - 1 Module	<b>45985 S</b>	
Module with Coaxial F-Type Connector - 1 Module	<b>45979 S</b>	
Module with Male IEC / F-Type Connector - 1 Module	<b>45982 S</b>	
Module with Female IEC / F-Type Connector - 1 Module	<b>45983 S</b>	
Module for 2 RJ45 Connectors - 2 Modules	<b>45971 S</b>	

<b>Data, Voice and Image Sockets</b>		
	<b>Ref.</b>	<b>Colour</b>
Module for 1 RJ45 Connector - 2 Modules	<b>45976 S</b>	
Module for 1 RJ45 Connector - 1 Module	<b>45977 S</b>	BR BM PM AL
Blind Face Plate - 1 Module	<b>45970 S</b>	
RJ45 Connector Cat. 6A UTP	<b>82021</b>	
RJ45 Connector Cat. 6 UTP	<b>21978</b>	
RJ45 Connector Cat. 6 UTP - Rack Assembly	<b>82020</b>	
RJ45 Connector Cat. 5e UTP	<b>21975</b>	
RJ45 Connector Cat. 6A STP	<b>82022</b>	-
RJ45 Connector Cat. 6 STP	<b>21988</b>	
RJ45 Connector Cat. 5e STP	<b>21985</b>	
RJ11 Connector Cat. 3	<b>21972</b>	
Module with Coupler for SC APC Duplex Fibre Optic Connector - 2 Modules	<b>45448 S</b>	
Module with Coupler for SC APC Simplex Fibre Optic Connector - 2 Modules	<b>45447 S</b>	BR BM PM AL
Module with Coupler for LC Duplex Fibre Optic Connector - 2 Modules	<b>45449 S</b>	
Protective Cover for SC APC Simplex Fibre Optic Coupler	<b>82970</b>	
Protective Cover for SC APC Duplex Fibre Optic Coupler	<b>82971</b>	-
R - TV - SAT (Star) Socket - 2 Modules	<b>45543 S</b>	
R - TV (Star) Socket - 2 Modules	<b>45533 S</b>	
R - TV - SAT (Terminal) Socket - 2 Modules	<b>45555 S</b>	
R - TV - SAT (Passage) Socket - 2 Modules	<b>45565 S</b>	BR BM PM AL
R - TV (Terminal) Socket - 2 Modules	<b>45554 S</b>	
R - TV (Passage) Socket - 2 Modules	<b>45564 S</b>	

**USB Power Sockets**


Double USB Charger Type A with 20° Outputs - 2 Modules	<b>45384 S</b>	
Double USB Charger Type A - 2 Modules	<b>45439 S</b>	BR BM PM AL
USB Charger Type A - 1 Module	<b>45383 S</b>	

**Power Sockets**

Safety Earth Socket (Schuko Type) with Screwless Terminals - 2 Modules	<b>45126 S</b>	
Safety Earth Socket (Schuko Type) with Screwless Terminals and Hinged Lid - 2 Modules	<b>45127 S</b>	
Safety Earth Socket (Schuko Type) - 2 Modules	<b>45129 S</b>	BR BM PM AL LR VD VM
Safety Earth Socket (Schuko Type) with Hinged Lid - 2 Modules	<b>45128 S</b>	
45° Safety Earth Socket (Schuko Type) - 2 Modules	<b>45132 S</b>	
45° Earth Socket (Schuko Type) - 2 Modules	<b>45131 S</b>	
45° Earth Socket (Schuko Type) with Blockage - 2 Modules	<b>45136 S</b>	VM

<b>Power Sockets</b>		
	<b>Ref.</b>	<b>Colour</b>
45° Earth Socket (Schuko Type) with Blockage and Signal Light - 2 Modules	<b>45137 S</b>	VM
Safety Earth Socket (French Type) with Screwless Terminals - 2 Modules	<b>45476 S</b>	
Safety Earth Socket (French Type) with Screwless Terminals and Hinged Lid - 2 Modules	<b>45477 S</b>	
Safety Earth Socket (French Type) - 2 Modules	<b>45479 S</b>	BR BM PM AL LR VD VM
Safety Earth Socket (French Type) with Hinged Lid - 2 Modules	<b>45475 S</b>	
45° Safety Earth Socket (French Type) - 2 Modules	<b>45112 S</b>	
45° Earth Socket (French Type) - 2 Modules	<b>45111 S</b>	
45° Earth Socket (French Type) with Blockage - 2 Modules	<b>45116 S</b>	VM
45° Earth Socket (French Type) with Blockage and Signal Light - 2 Modules	<b>45117 S</b>	
Safety Earth Socket (Euro-USA Type) - 2 Modules	<b>45142 S</b>	BR BM PM AL
Earth Socket (Euro-USA Type) - 2 Modules	<b>45140 S</b>	
Earth Socket (USA Nema Type) - 2 Modules	<b>45144 S</b>	BR BM PM AL VM
Double Safety Earth Socket (USA Type) 127 V 15 A - 3 Modules	<b>45147 S</b>	
Double Earth Socket (USA Type) 127 V 15 A - 3 Modules	<b>45146 S</b>	BR BM PM AL
Safety Earth Socket (Italian Type) 10 A - 1 Module	<b>45423 S</b>	
Safety Earth Socket (Italian Type) 16 A - 1 Module	<b>45425 S</b>	BR BM PM AL VM
Safety Earth Socket (Italian Type) 10 / 16 A - 1 Module	<b>45421 S</b>	
Safety Earth Socket (Brazilian Type) 10 A - 1 Module	<b>45413 S</b>	BR BM PM AL VM
Earth Socket (Brazilian Type) 10 A - 1 Module	<b>45412 S</b>	BR BM PM AL
Safety Earth Socket (Brazilian Type) 20 A - 1 Module	<b>45415 S</b>	BR BM PM AL VM
Earth Socket (Brazilian Type) 20 A - 1 Module	<b>45414 S</b>	BR BM PM AL
Block of Two Safety Earth Sockets (Schuko Type) - 4 Modules	<b>45192 S</b>	
Block of Two Earth Sockets (Schuko Type) - 4 Modules	<b>45190 S</b>	
Block of Three Safety Earth Sockets (Schuko Type) - 6 Modules	<b>45196 S</b>	
Block of Three Earth Sockets (Schuko Type) - 6 Modules	<b>45194 S</b>	BR VM
Block of Two Safety Earth Sockets (French Type) - 4 Modules	<b>45193 S</b>	
Block of Two Earth Sockets (French Type) - 4 Modules	<b>45191 S</b>	
Block of Three Safety Earth Sockets (French Type) - 6 Modules	<b>45197 S</b>	
Block of Three Earth Sockets (French Type) - 6 Modules	<b>45195 S</b>	

S - Semi-assembled | BR - White; BM - Matte White; PM - Matte Black; AL - Aluminium; LR - Orange; VD - Green; VM - Red.

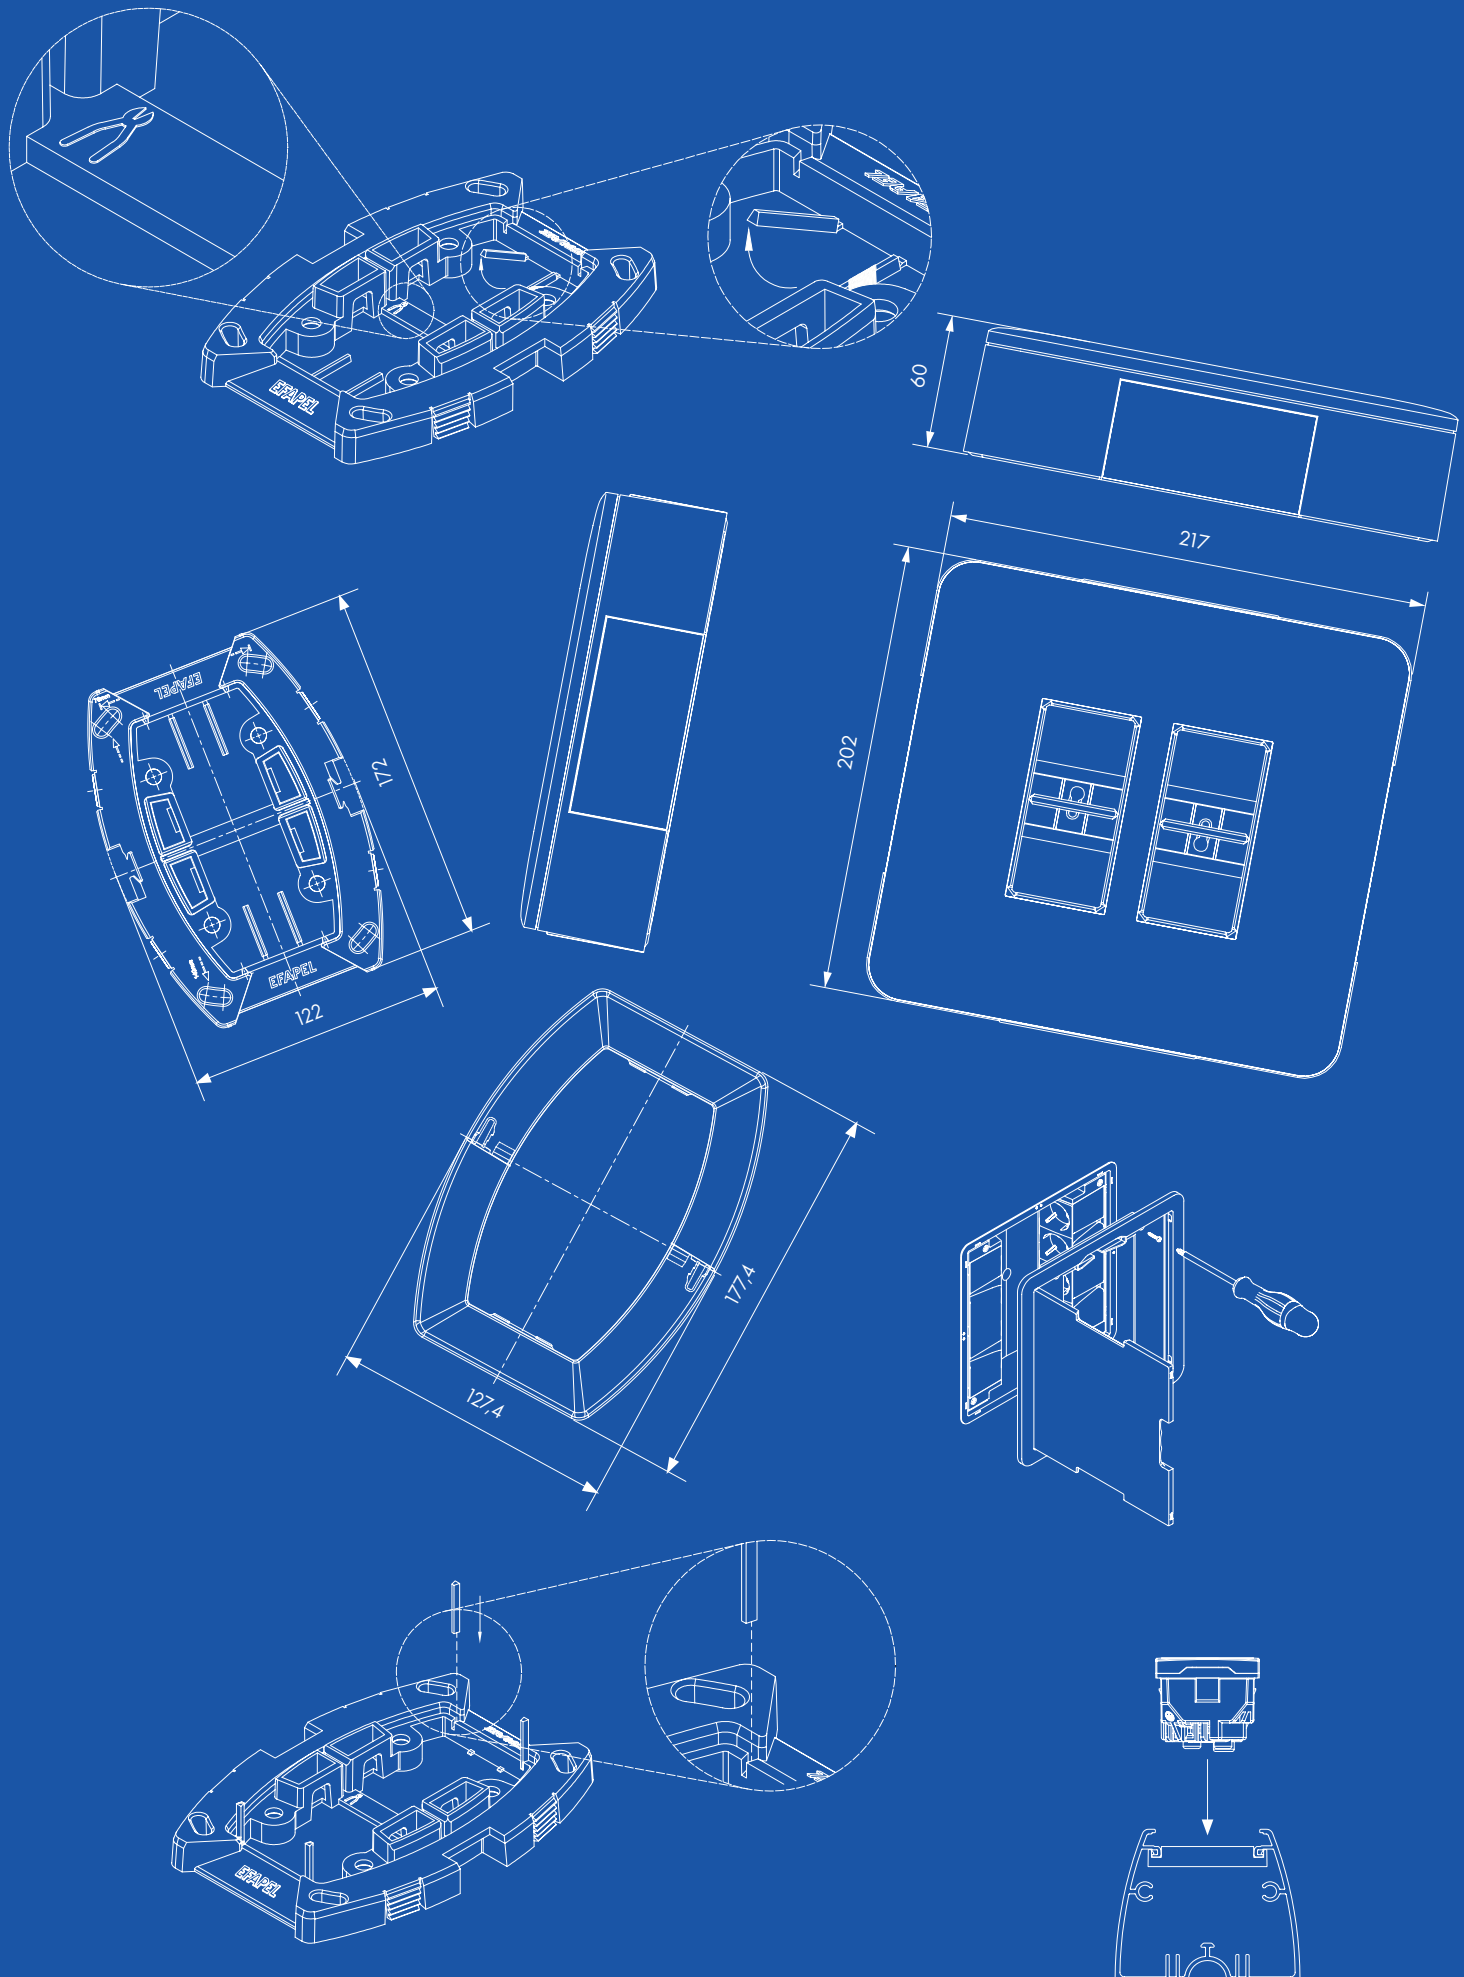


**Floor Box - 4 Modules**

**Description**


**Ref. 83002 C**



Box for concrete installation through Flush Mounting Boxes (Ref. 83052) and on technical floor through claws.  
Available in colours **CZ** - Grey, **AT** - Anthracite and **BR** - White.  
Applicable with **MEC Q45** devices.

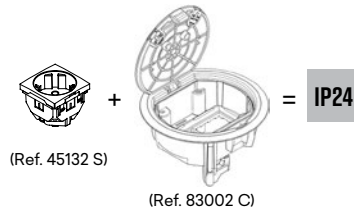


**Mounting Diagram**

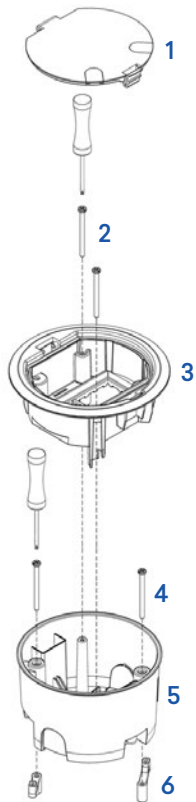

- 1 - Floor Box Cover - 4 Modules.
- 2 - Self-tapping screws for plastic claw.
- 3 - Floor Box - 4 Modules (Ref. 83002 C).
- 4 - Self-tapping screws for plastic claw.
- 5 - Flush Mounting Box for Floor Box - 4 Modules (Ref. 83052).
- 6 - Plastic claw for Floor Box.

**Dimensions (mm)**

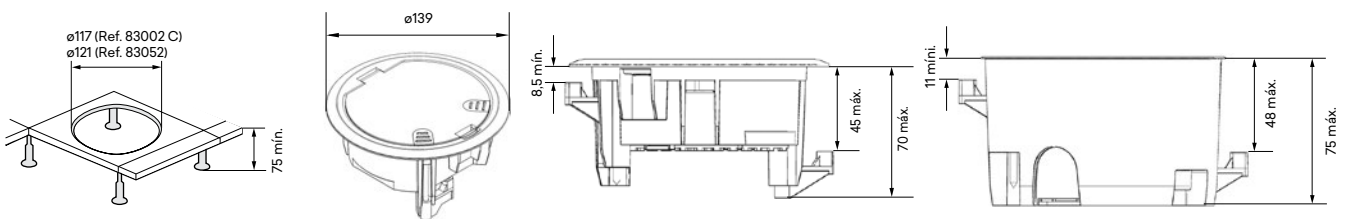

**Floor Boxes - 8, 12, 16, 24 Modules**

**Description**



**IK10**


**Ref. 83004 C | 83006 C | 83008 C | 83012 C**

Box for concrete installation through Flush Mounting Boxes and on technical floor through claws.


Available in colours **CZ** - Grey, **AT** - Anthracite.

Available with Inox Cover (Ref. 83008 C) in colours: **ZI** - Grey/Inox, **AI** - Anthracite/Inox.


Applicable with MEC **Q45** devices.

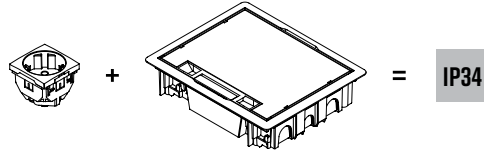


**Installation in Technical Floor**

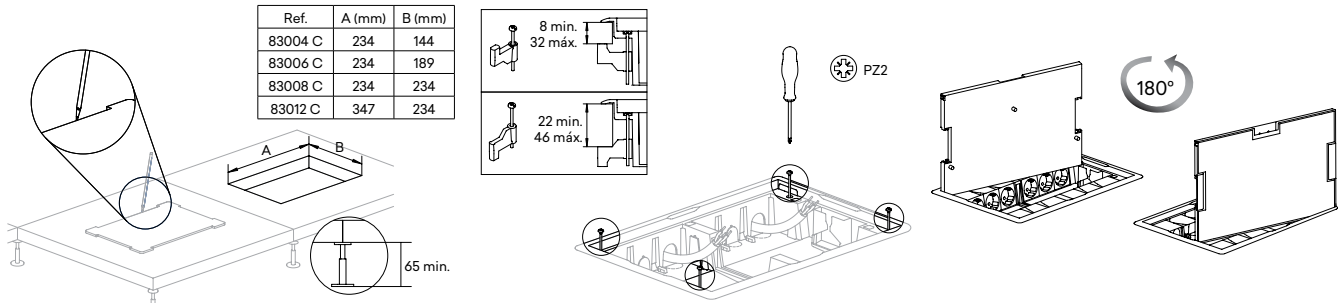

**Installation in Concrete with Flush Mounting Box**

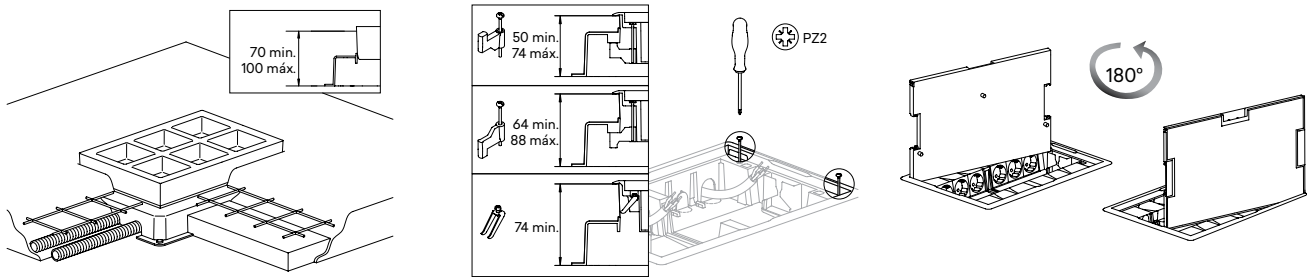

**Dimensions (mm)**

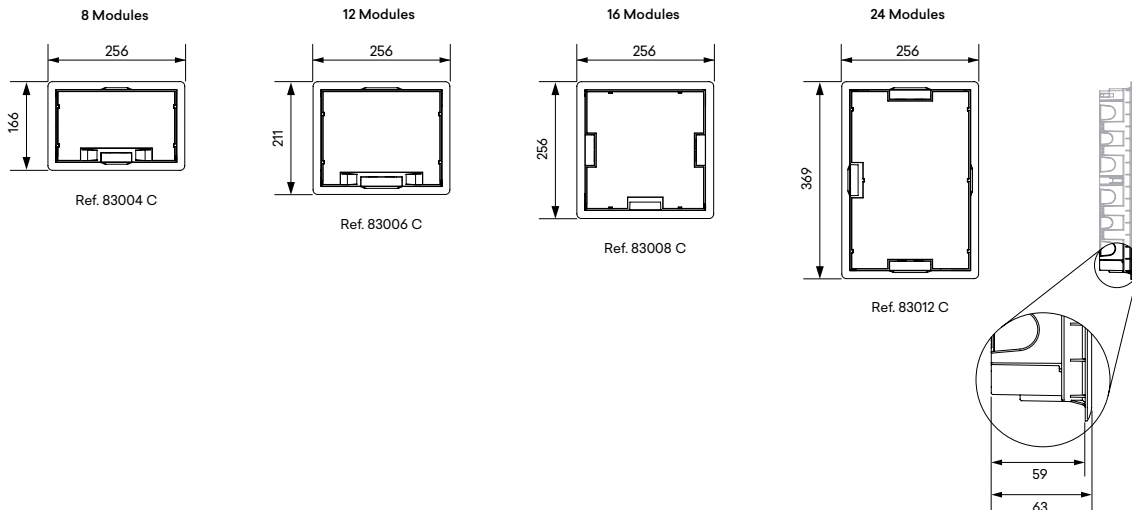

**EN 60670-1; EN 60670-23 Standards**

Section 7	Classification	4, 8, 12, 16 and 24 Modules
7.1	Nature of the material	Insulating
7.2	Type of installation	Embedded, semi-embedded or integrated into combustible walls, ceilings or flooring
		Embedded, semi-embedded or integrated into hollow or partition walls (false ceilings, walls, floors), furniture
		For tunnel type installation during the concrete projection step (7.6)
		Treatment of flooring: in boxes and enclosures for installation in floorings submitted to dry treatment
7.3	Types of inputs (outputs)	With inputs for plain or corrugated pipes
7.4	Means for fixing cables and pipes	Without fixing
7.5	Minimum and maximum temperatures during the installation	-25 °C to +60 °C
7.6	Maximum temperature during the concrete filling step	90 °C
7.8	Means for fixing the devices to the boxes	Boxes designed to enable other means of fixing
7.101	Type of movable cover	Enclosure with removable cover

**Tests - EN 50085-1; EN 50085-2-2 Standards**

Section 10	Classification	4 Modules	8, 12, 16 and 24 Modules
10.3.2	Impact test of mechanical resistance for installation and application	2 J	5 J
10.3.2	EN 50102 - IK Test	IK08	IK10
10.5.1	IEC 60884-1 – NP 1260 Fixation of low voltage devices - resistance to extraction test	Declared Force of Extraction: 90 N 1,5 x 90 = 135 N	
10.5.103	Resistance to vertical load applied through a small surface area	750 N	
10.5.104	Resistance to vertical load applied through a large surface area	3000 N	

**Workstation Surface Mounting - 2x4 + 4x4 Modules**


**Description**




**Ref. 83410 S**

Workstation for Surface Mounting in masonry.  
 Available in colours BR - White, BM - Matte White, PM - Matte Black, AL - Aluminium.  
 Applicable with MEC Q45 devices.


**Installation**

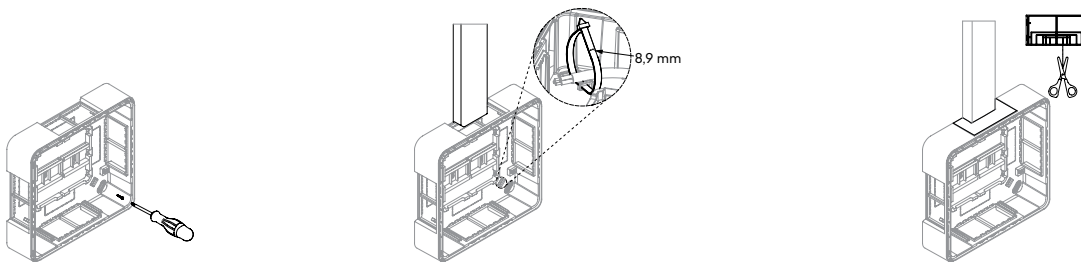


**Installation with Mec Q45 Devices**

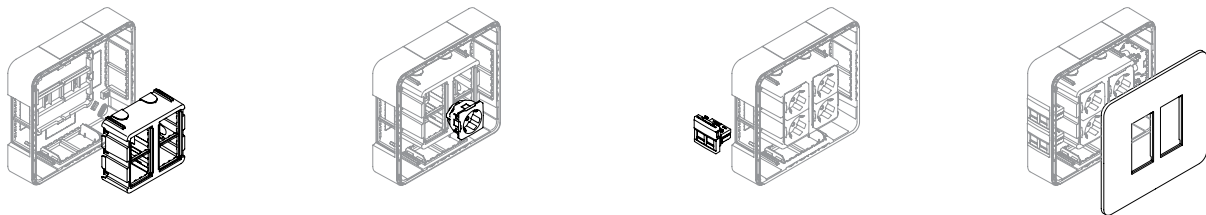

**Installation with MODUS 55**

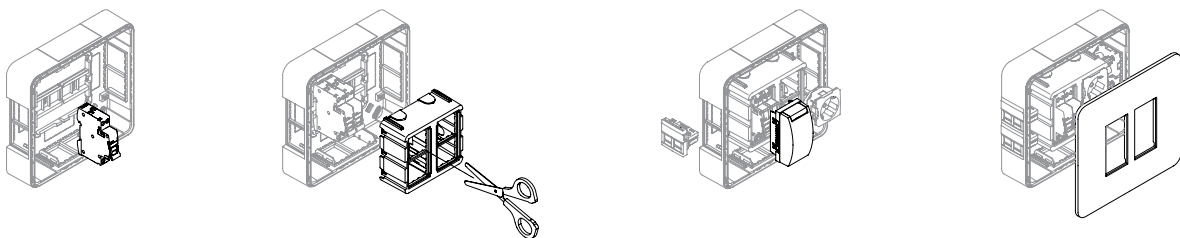

**Dimensions (mm)**

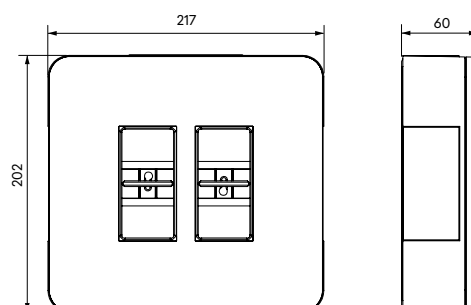

**Workstations Surface Mounting 2X4 | 3x4 | 4X4 Modules**


**Description**




**Ref. 83411 S | 83412 S | 83413 S**

Workstation for Surface Mounting in masonry.  
Available in colours BR - White, BM - Matte White, PM - Matte Black, AL - Aluminium.  
Applicable with MEC Q45 devices.


**Installation**

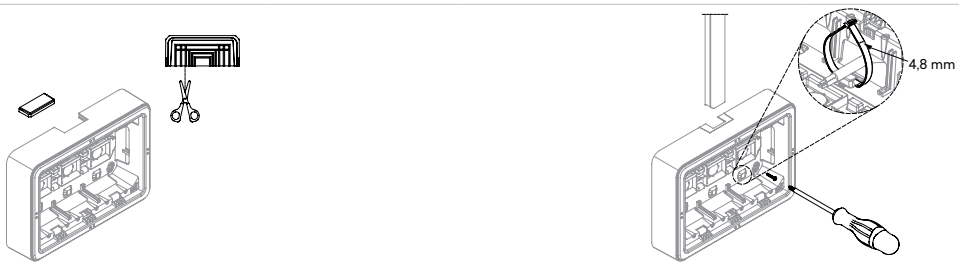


**Installation with Mec Q45 Devices**

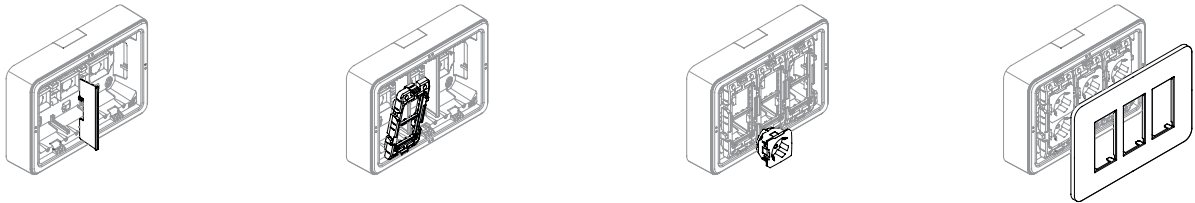

**Installation with MODUS 55**

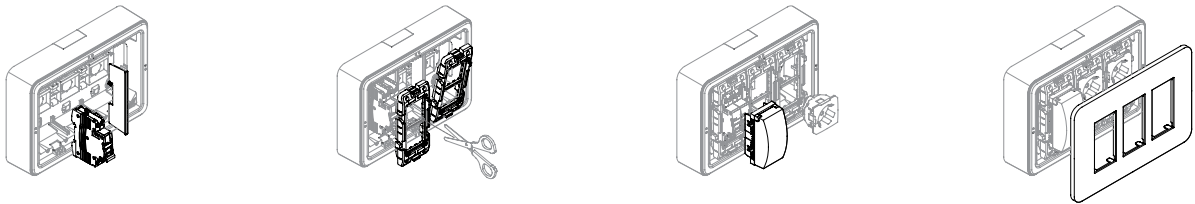

**Dimensions (mm)**

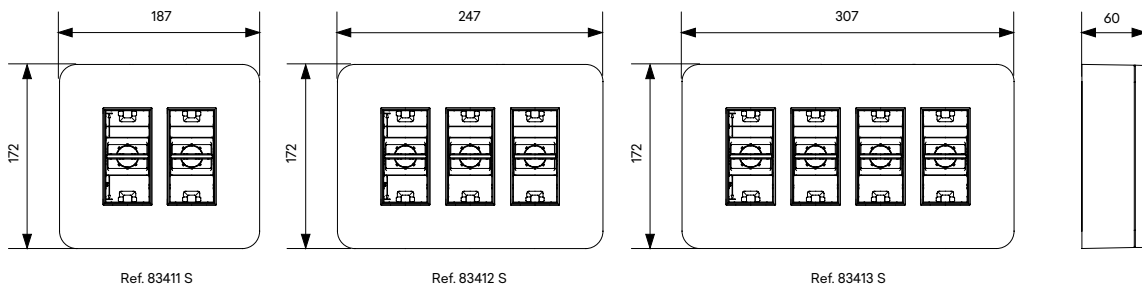

**EN 60670-1; EN 60670-24 Standards**

Section 7	Classification	Workstations Surface Mounting
7.1	Nature of the material	Insulating
7.2	Type of installation	Surface mounting on: - non-combustible walls, ceilings or furniture; - combustible walls, ceilings or furniture.
7.3	Types of inputs (outputs)	Without inputs Input openings are made during installation
7.4	Means for fixing cables and pipes	With cable retention
7.5	Minimum and maximum temperatures during the installation	-5 °C to +60 °C
7.8	Means for fixing the devices to the boxes	Boxes designed to enable other means of fixing
7.102	Enclosure	Enclosure PD (for predetermined equipment)
	Degree of protection of the enclosure: IP3XC Impact test: IK07	
	The maximum permissible load within the enclosure 2x4 + 4x4 is 1,4 Kg (The maximum load was verified by the maximum weight of the MCB applied and with an increase of 1.5)	
	The maximum permissible load within the enclosure 2x4 is 1,4 Kg (The maximum load was verified by the maximum weight of the MCB applied and with an increase of 1.5)	
	The maximum permissible load within the enclosure 3x4 is 2,1 Kg (The maximum load was verified by the maximum weight of the MCB applied and with an increase of 1.5)	
	The maximum permissible load within the enclosure 4x4 is 2,8 Kg (The maximum load was verified by the maximum weight of the MCB applied and with an increase of 1.5)	
	Rated Voltage - 250 V ~ Rated Current - 63 A	

**Information**

Annex BB		
BB3	Devices to be integrated in the enclosure by the installer	The devices integrated in the enclosure by the installer shall comply with their applicable product standards, (e.g. 1 MCB shall comply with IEC 60898-1, 1 RCCB shall comply with IEC 61008-1 and 1 RCBO shall comply with IEC 61009-1). The sockets shall comply with IEC 60884-1 and have safety shutters (Ref. 45132 S, 45112 S). Compatible with devices 45x45 - <b>MEC Q45</b> .
BB5	Connections	Terminals must be used in accordance with the standard EN 60998-2-1.
BB6	Protection against electric shock	Active parts shall remain inaccessible after devices are installed in the enclosure. Devices mounted in the enclosure shall have a minimum IP degree of IP3X.
BB8	Wiring	The installation must ensure that the internal wiring shall be such that minimum creepage distances between live parts and metallic accessible or non-accessible parts are not less than 3 mm. The cross-sections of conductors shall be in accordance with the wiring installation rules

**IEC 60884-1; NP 1260-1 Standards**

Section 9		
9.4	Fixing of low voltage devices	90 N x 1,5 = 135 N

**Workstations Flush Mounting 2x4 | 3x4 | 4x4 Modules**


**Description**




**Ref. 83401 S | 83402 S | 83403 S**

Workstation for installation in masonry or in hollow walls by using claws.  
 Available in colours BR - White, BM - Matte White, PM - Matte Black, AL - Aluminium.  
 Applicable with MEC Q45 devices.


**Installation in Masonry**

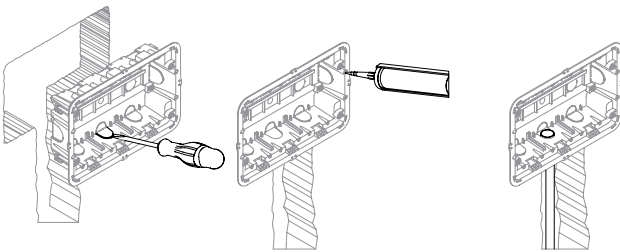


**Installation in Hollow Walls**

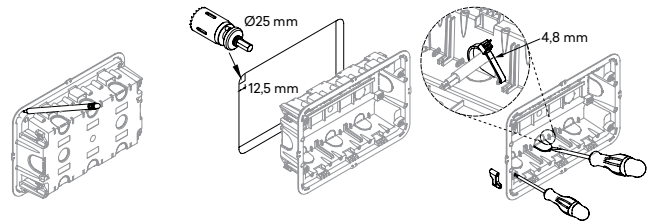


**Installation with Mec Q45 Devices**

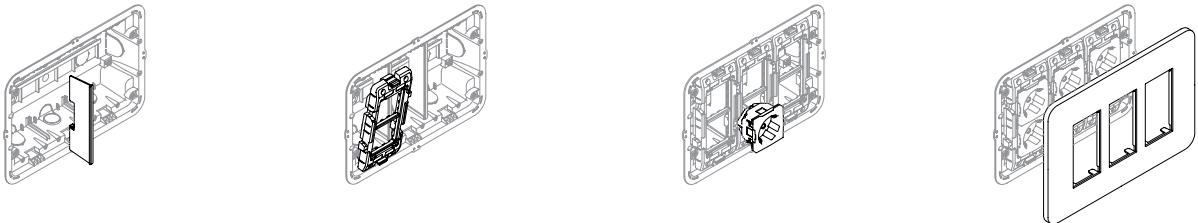

**Installation with MODUS 55**

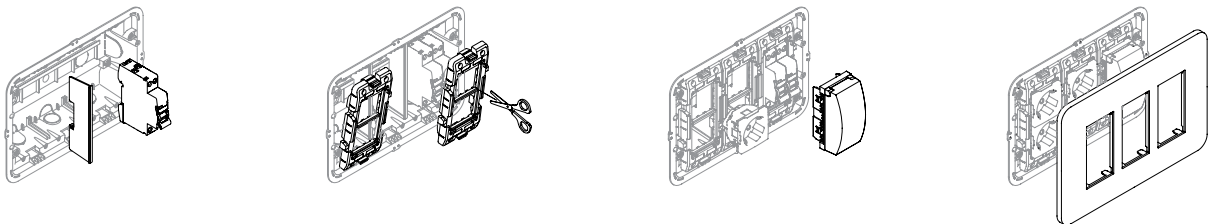

**Dimensions (mm)**

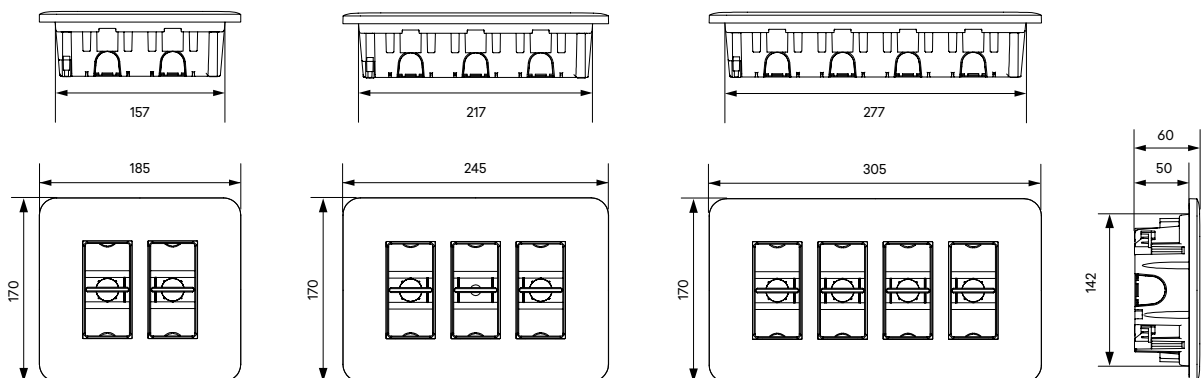

**EN 60670-1; EN 60670-24 Standards**

Section 7	Classification	Workstations Flush Mounting
7.1	Nature of the material	Insulating
7.2	Type of installation	Embedded, semi-embedded or integrated: non-combustible walls or ceilings; combustible walls or ceilings; hollow or partition walls (false ceilings, walls), furniture.
7.3	Types of inputs (outputs)	With inputs for plain or corrugated pipes
7.4	Means for fixing cables and pipes	With cable retention
7.5	Minimum and maximum temperatures during the installation	-5 °C to +60 °C
7.7	Boxes or enclosures for hollow or partition walls, classified according to 7.2.1.3	Degree of protection of the enclosure: IP3XC
7.8	Means for fixing the devices to the boxes	Boxes designed to enable other means of fixing
7.102	Enclosure	Enclosure PD (for predetermined equipment)
	Resistance of the enclosure embedded area (back box) to the glow-wire test a 850 °C	
	Impact test - IK07	
	The maximum permissible load within the enclosure 2x4 is 1,4 Kg (The maximum load was verified by the maximum weight of the MCB applied and with an increase of 1.5)	
	The maximum permissible load within the enclosure 3x4 is 2,1 Kg (The maximum load was verified by the maximum weight of the MCB applied and with an increase of 1.5)	
	The maximum permissible load within the enclosure 4x4 is 2,8 Kg (The maximum load was verified by the maximum weight of the MCB applied and with an increase of 1.5)	
	Rated Voltage - 250 V ~ Rated Current - 63 A	

**Information**

Annex BB		
BB3	Devices to be integrated in the enclosure by the installer	The devices integrated in the enclosure by the installer shall comply with their applicable product standards, (e.g. 1 MCB shall comply with IEC 60898-1, 1 RCCB shall comply with IEC 61008-1 and 1 RCBO shall comply with IEC 61009-1). The sockets shall comply with IEC 60884-1 and have safety shutters (Ref. 45132 S, 45112 S). Compatible with devices 45x45 - <b>MEC Q45</b> .
BB5	Connections	Terminals must be used in accordance with the standard EN 60998-2-1.
BB6	Protection against electric shock	Active parts shall remain inaccessible after devices are installed in the enclosure. Devices mounted in the enclosure shall have a minimum IP degree of IP3X.
BB8	Wiring	The installation must ensure that the internal wiring shall be such that minimum creepage distances between live parts and metallic accessible or non-accessible parts are not less than 3 mm. The cross-sections of conductors shall be in accordance with the wiring installation rules

**EN 50085-1 Standard**

Section 9		
9.4	Screwed mechanical connections	0,8 Nm

**IEC 60884-1; NP 1260-1 Standards**

Section 9		
9.4	Fixing of low voltage devices	90 N x 1,5 = 135 N

**Workstation Flush Mounting with Door 2x8 Modules**


**Description**




**Ref. 83404 S**

Workstation for installation in masonry or in hollow walls by using claws.  
Available in colours BR - White.  
Applicable with MEC Q45 devices.


**Installation in Masonry**

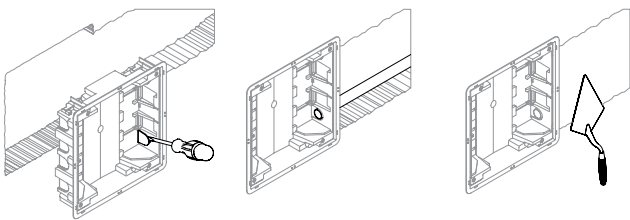


**Installation in Hollow Walls**

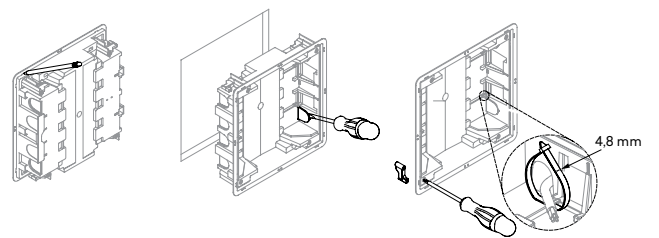


**Installation with Mec Q45 Devices**

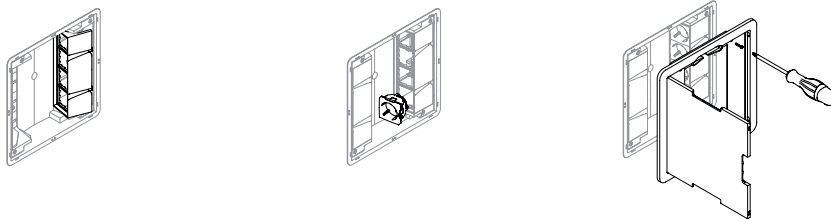

**Installation with MODUS 55**

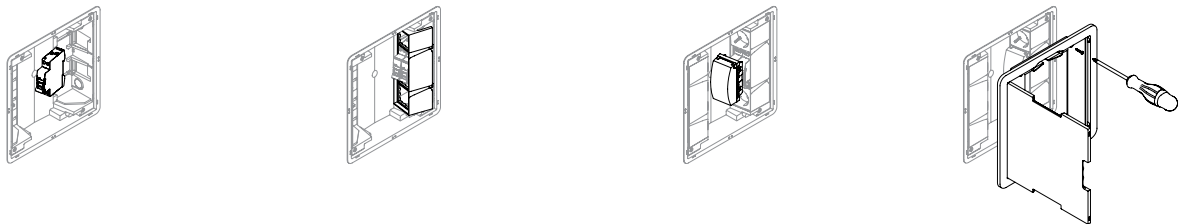

**Dimensions (mm)**

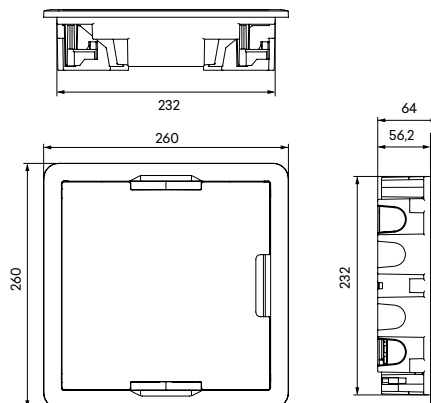

**EN 60670-1; EN 60670-24 Standards**

Section 7	Classification	Workstation Flush Mounting with Door
7.1	Nature of the material	Insulating
7.2	Type of installation	Embedded, semi-embedded or integrated: non-combustible walls or ceilings; combustible walls or ceilings; hollow or partition walls (false ceilings, walls), furniture..
7.3	Types of inputs (outputs)	With inputs for plain or corrugated pipes
7.4	Means for fixing cables and pipes	With cable retention
7.5	Minimum and maximum temperatures during the installation	-5 °C to +60 °C
7.7	Boxes or enclosures for hollow or partition walls, classified according to 7.2.1.3	Degree of protection of the enclosure: IP3XC
7.8	Means for fixing the devices to the boxes	Boxes designed to enable other means of fixing
7.102	Enclosure	Enclosure PD (for predetermined equipment)
	Resistance of the enclosure embedded area (back box) to the glow-wire test a 850 °C	
	Impact test - IK07	
	The maximum permissible load within the enclosure is 1,4 Kg (The maximum load was verified by the maximum weight of the MCB applied and with an increase of 1.5)	
	Rated Voltage - 250 V ~ Rated Current - 63 A	

**Information**

Annex BB		
BB3	Devices to be integrated in the enclosure by the installer	The devices integrated in the enclosure by the installer shall comply with their applicable product standards, (e.g. 1 MCB shall comply with IEC 60898-1, 1 RCCB shall comply with IEC 61008-1 and 1 RCBO shall comply with IEC 61009-1). The sockets shall comply with IEC 60884-1 and have safety shutters (Ref. 45132 S, 45112 S). Compatible with devices 45x45 - <b>MEC Q45</b> .
BB5	Connections	Terminals must be used in accordance with the standard EN 60998-2-1.
BB6	Protection against electric shock	Active parts shall remain inaccessible after devices are installed in the enclosure. Devices mounted in the enclosure shall have a minimum IP degree of IP3X.
BB8	Wiring	The installation must ensure that the internal wiring shall be such that minimum creepage distances between live parts and metallic accessible or non-accessible parts are not less than 3 mm. The cross-sections of conductors shall be in accordance with the wiring installation rules

**EN 50085-1 Standard**

Section 9		
9.4	Screwed mechanical connections	0,8 Nm

**IEC 60884-1; NP 1260 Standard**

Section 9		
9.4	Fixing of low voltage devices	90 N x 1,5 = 135 N

**Desktop Workstations**

**Description**




**IK09**


**Ref. 83201 S | 83202 S**

It can be attached to a desk, wall, DIN rail or to another location.  
Applicable with **MEC Q45** devices.


**Mounting Diagram**

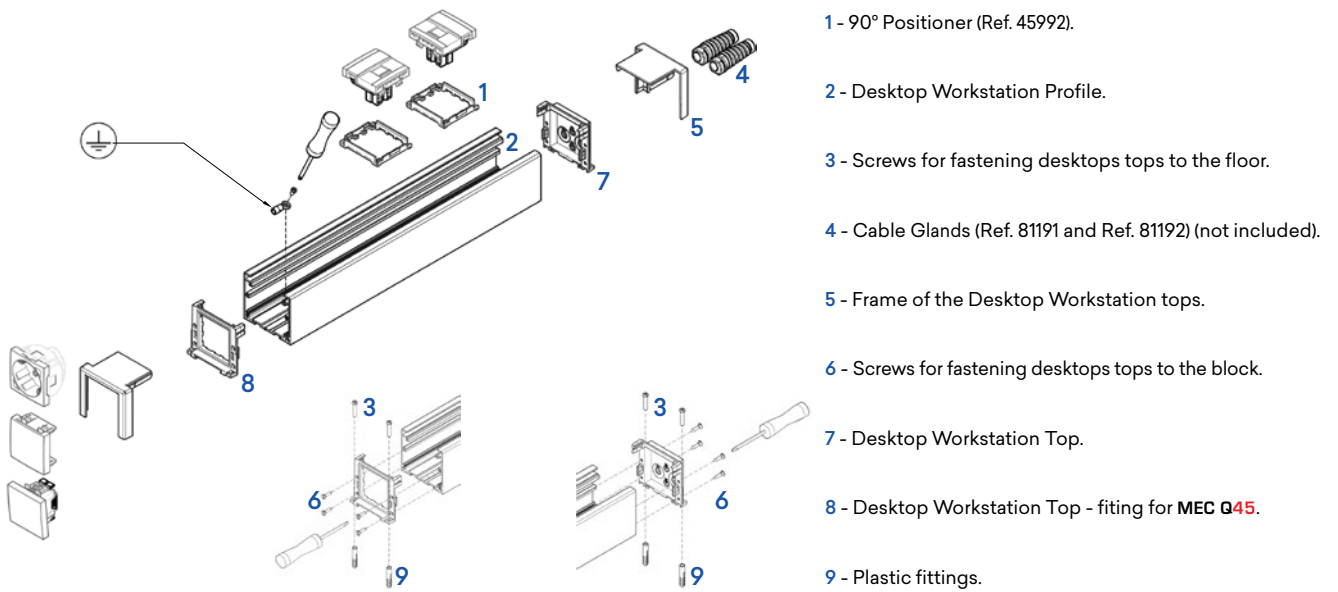

**Ref. 83220 - Mounting Diagram**

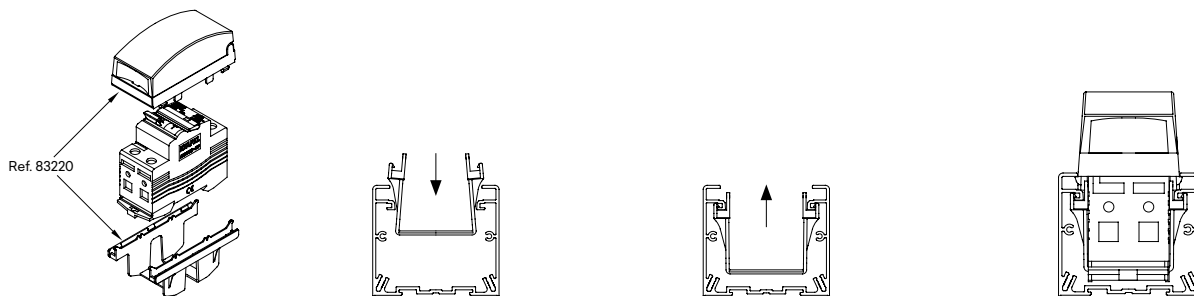


**Ref. 45992 - Mounting Diagram**


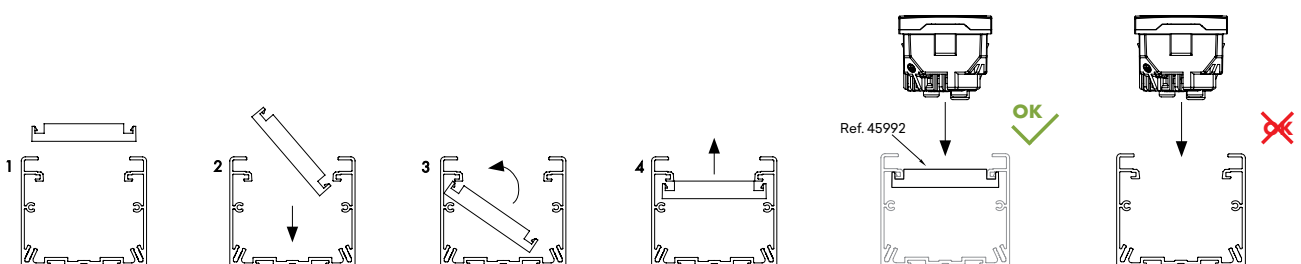


**Desktop Workstations**

**Ref. 83234 - Mounting Diagram**

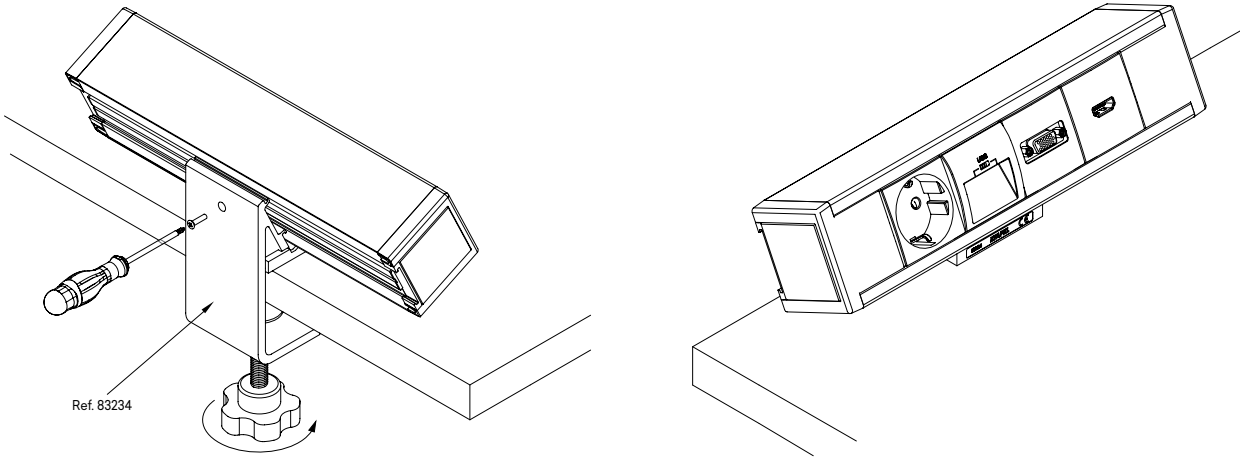




**Dimensions (mm)**

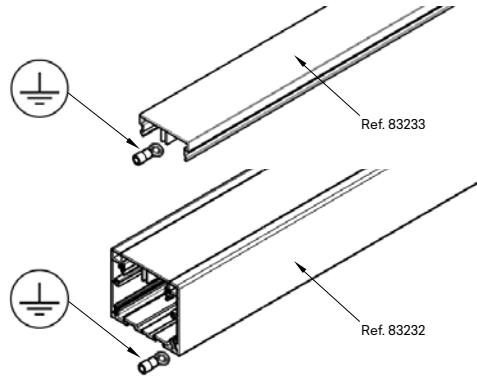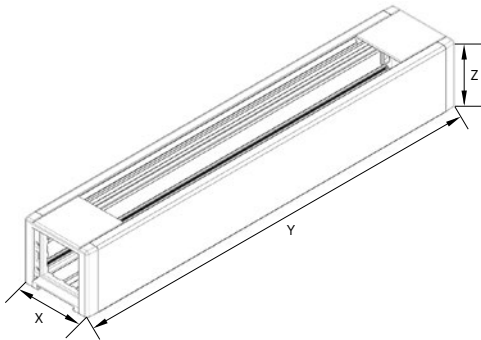

	X	Y	Z
Ref. 83201 S (8 + 2 Modules)	62,0 mm	269,5 mm	54,5 mm
Ref. 83202 S (12 + 2 Modules)	62,0 mm	360,5 mm	54,5 mm

Ref. 83233	2100 mm
Ref. 83232	2100 mm




**Section**



Refs. 83232, 83201 S, 83202 S + 45132 S

Refs. 83232, 83201 S, 83202 S + 55316 6BY

**Maximum Diameter Available (mm)**



Refs. 83232, 83201 S, 83202 S + 45132 S

Refs. 83232, 83201 S, 83202 S + 55316 6BY

**Profile Selection**

Ref.	Profile Characteristics			Insulated Cables Capacity					
	Section	Internal Section (S)	Available Section (Su)	Max ø Available (mm)	Max. Nr. Conductors H07 V-U				
		(mm <sup>2</sup> )	(S/1,4) (mm <sup>2</sup> )		1,5mm <sup>2</sup>	2,5mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>	
Profile and Desktop Workstations	83232   83201 S   83202 S	①	2497	1784	38	223	149	119	89
Profile and Desktop Workstations with MEC Q45 Soket	83232   83201 S   83202 S + 45132 S	②	1150	821	13	103	68	55	41
Profile and Desktop Workstations with RCBO	83232   83201 S   83202 S + 55316 6BY	③	774	552	9,7	69	45	36	27

**EN 50085-2-1 STANDARD**

Section 6	Classification	Desktop Workstations
6.2	Resistance to impact for installation and application	10 J
6.3	Minimum storage and transport temperature	-45 °C
6.3	Minimum installation and operation temperature	-25 °C
6.3	Maximum operation temperature	60 °C
6.4	Resistance to flame propagation	Non-flame propagating
6.5	Electrical continuity	With electrical continuity $1,5 \times 10^{-4} \Omega/m$
6.6	Electrical insulation	Without electrical insulation
6.7	Protection degree provided by the enclosure	IP30
6.8	Protection against corrosive or polluting substances	Medium protection outside and inside
6.9	Access system to the retention of the cover	The cover can only be removed with a tool
6.10	Electrical protective separation	Without electrical protective partition (divider)
6.101	Installation positions	Surface mounting, fixed to a wall or ceiling
6.102	Prevention of contact between liquids and insulated conductors and live parts in case of assembly on skirting and on wet floor	Not declared
6.103	Type	3 (Installation)
	Rated Voltage	500 V ~

**Minicolumns**


**Description**



**Ref. 83282 | 83281 | 83283**


Enables the placement of all the interconnection points (energy and communication) next to the workstation.  
Applicable with MEC Q45 devices.

**Mounting Diagram**

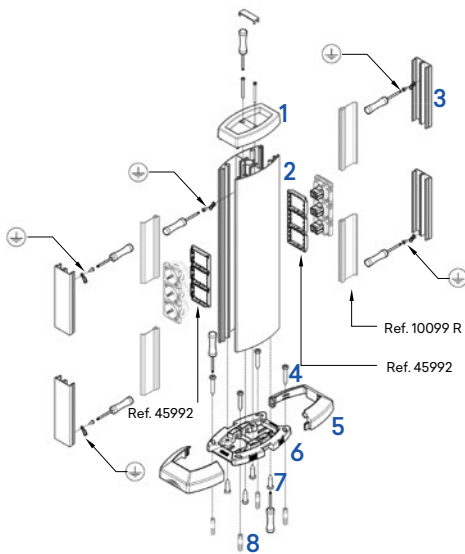


- 1 - Top for Minicolumn (Ref. 83290 A).
- 2 - Minicolumn Profile (Ref. 83253).
- 3 - Cover of Minicolumn (Ref. 83233).
- 4 - Screws to fix base of Minicolumn to ground.
- 5 - Frame of Minicolumn.
- 6 - Base of Minicolumn (Ref. 83251 A).
- 7 - Screws to fix Minicolumn to base.
- 8 - Plastic fittings.

**Ref. 83251 A - Mounting Diagram**

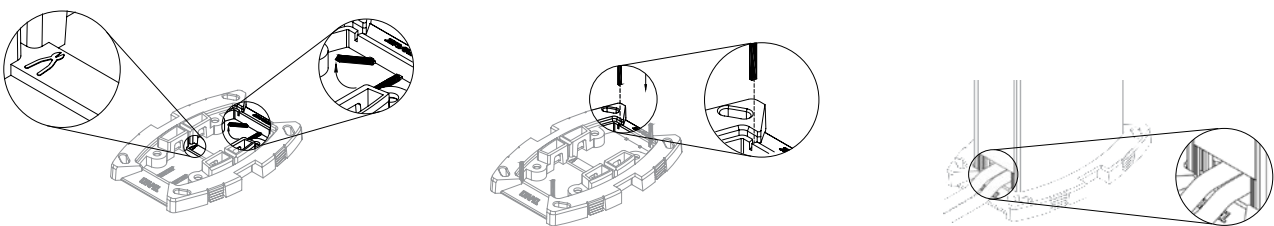


**Ref. 83220 - Mounting Diagram**

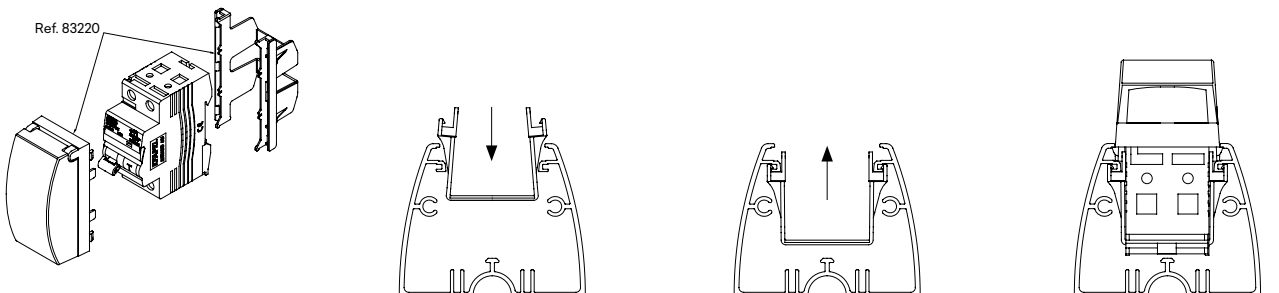


**Minicolumns**


**Dimensions (mm)**

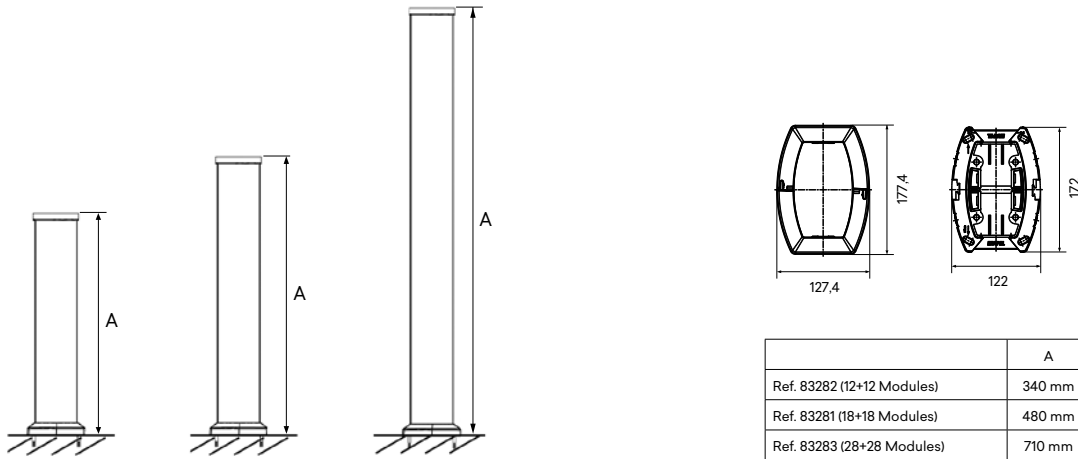


**Ref. 45992 - Mounting Diagram**

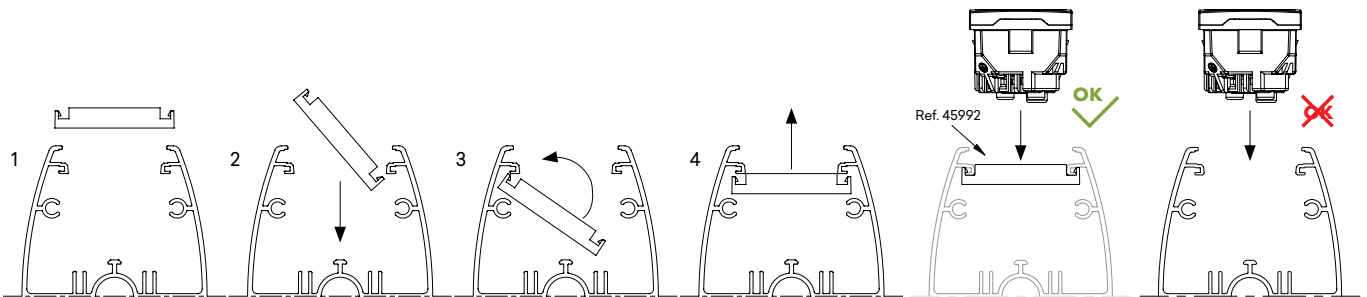

**Section**

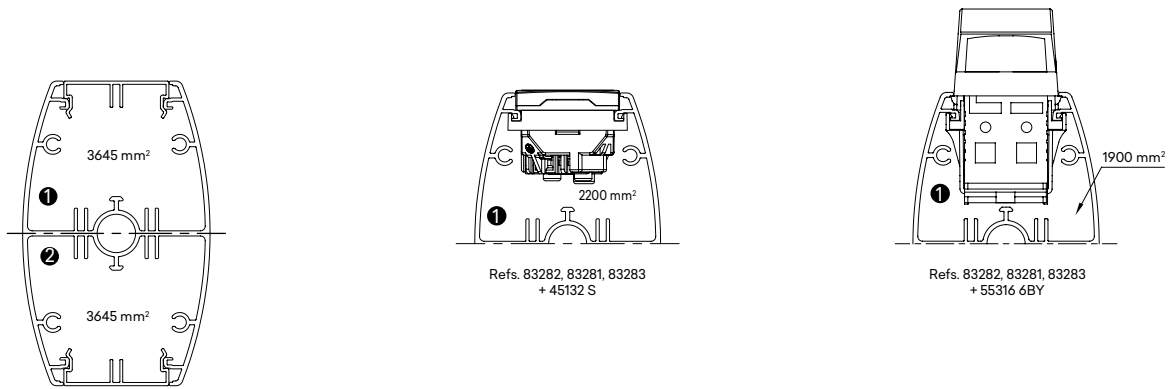

**Maximum Diameter Available (mm)**

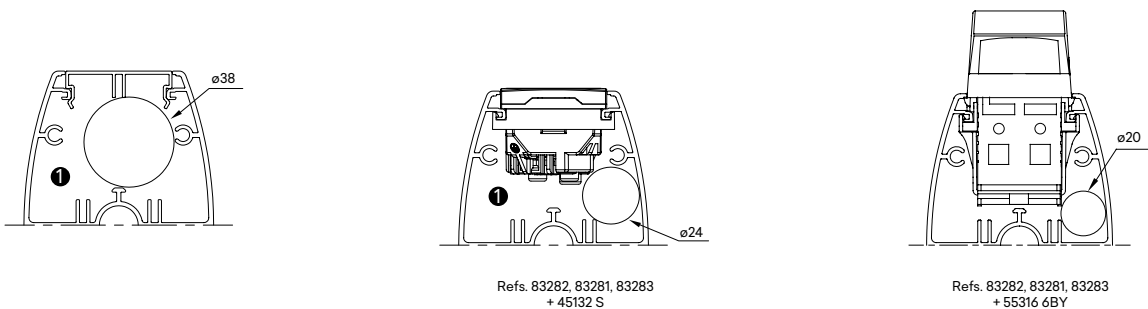

**Columns**


**Description**



**Ref. 83241 | 83242**


Allows the power supply and the passage of cables between the ceiling and the floor.  
Applicable with MEC Q45 devices.

**Mounting Diagram**

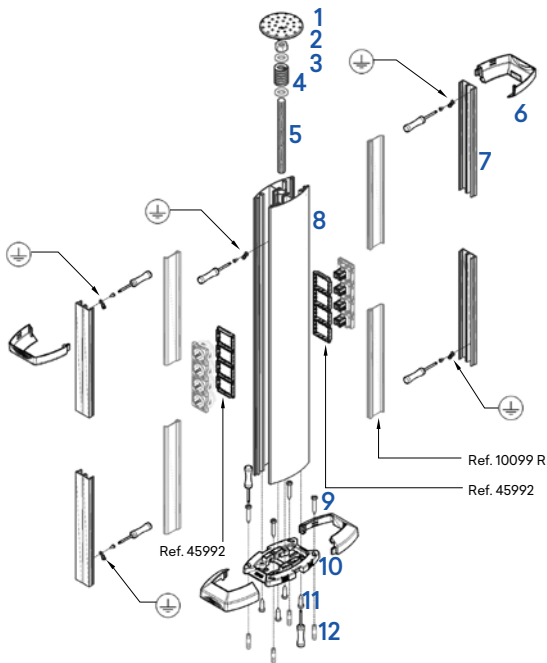


- 1 - Ceiling fixing device.
- 2 - Hexagon Nut M16x13.
- 3 - Ring M16x13.
- 4 - Spring.
- 5 - Screw Rod M16x1000 (Ref. 83252 A).
- 6 - Column Frame.
- 7 - Column Cover (Ref. 83233).
- 8 - Column Profile (Ref. 83253).
- 9 - Screws to fix the base of the Column to the ground.
- 10 - Column Base (Ref. 83251 A).
- 11 - Screws to fix the Column to the base.
- 12 - Plastic fittings.

**Ref. 83251 A - Mounting Diagram**


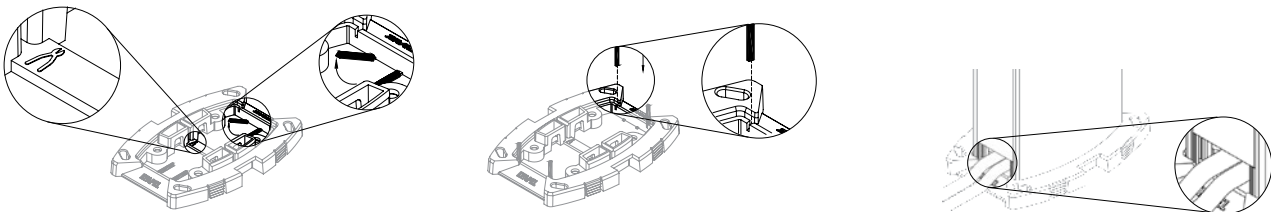


**Ref. 83220 - Mounting Diagram**

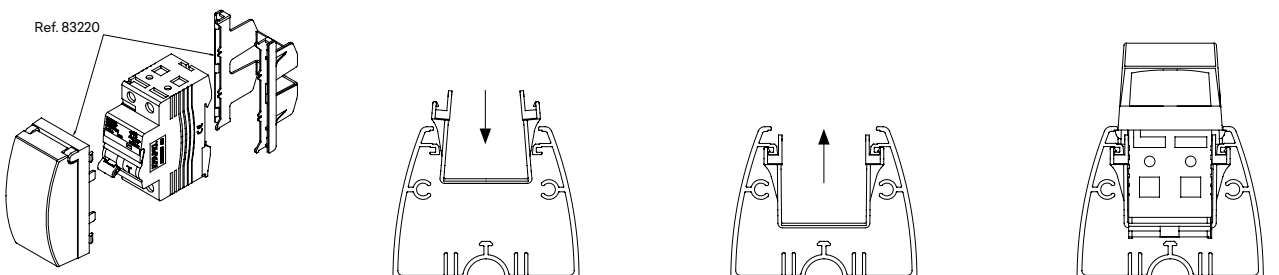


**Columns**

**Dimensions (mm)**

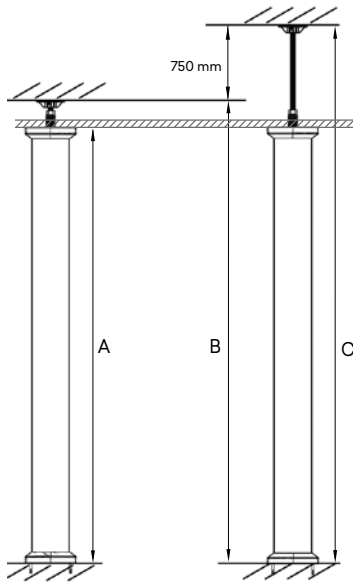


	A	B	C
Ref. 83241	2730 mm	2850 mm	3600 mm
Ref. 83242	3180 mm	3300 mm	4050 mm


**Ref. 45992 - Mounting Diagram**

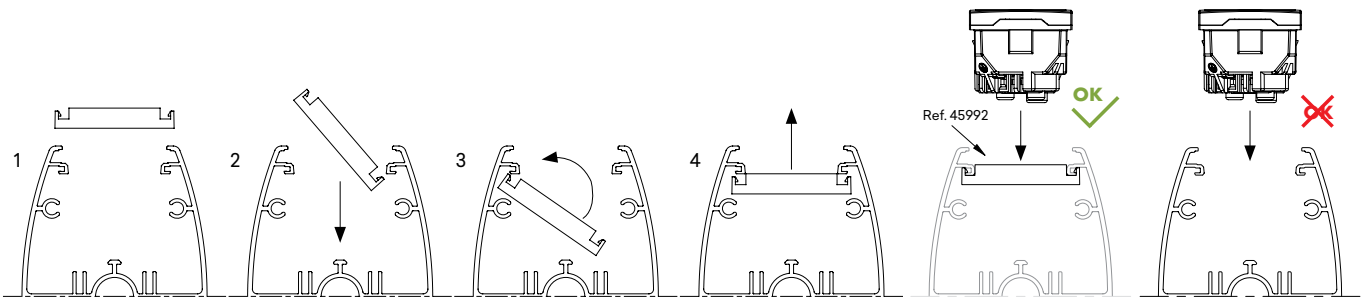

**Section**

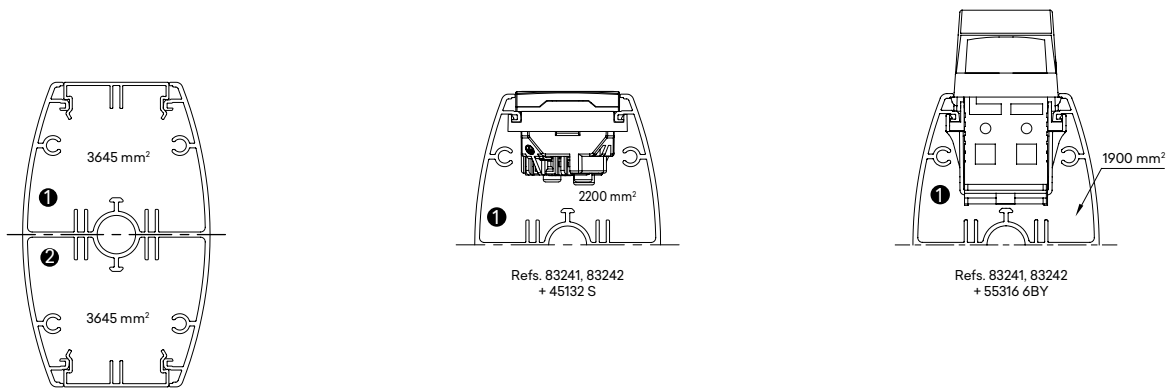

**Maximum Diameter Available (mm)**

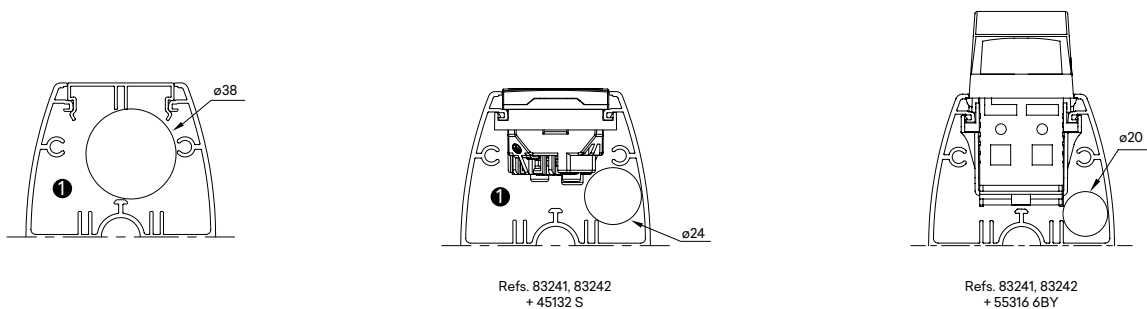

**Minicolumns and Columns**

**Profile Selection**


Ref.	Profile Characteristics			Insulated Cables Capacity				
	Section	Internal Section (S)	Available Section (Su)	Max ø Available (mm)	Max. Nr. Conductors H07 V-U			
		(mm <sup>2</sup> )	(S/1,4) (mm <sup>2</sup> )		1,5mm <sup>2</sup>	2,5mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>
Minicolumns and Columns	①	3645	2604	38	325	217	174	130
	②							
Minicolumns and Columns with MEC Q45 Socket	①	2200	1571	24	196	131	105	79
	②							
Minicolumns and Columns with RCBO	①	1900	1357	20	170	113	90	67
	②							

**EN 50085-2-1 Standard**

Section 6	Classification	Minicolumns and Columns
6.2	Resistance to impact for installation and application	10 J
6.3	Minimum storage and transport temperature	-45 °C
6.3	Minimum installation and operation temperature	-25 °C
6.3	Maximum operation temperature	60 °C
6.4	Resistance to flame propagation	Non-flame propagating
6.5	Electrical continuity	With electrical continuity 5x10 <sup>-5</sup> Ω/m
6.6	Electrical insulation	Without electrical insulation
6.7	Protection degree provided by the enclosure	IP31
6.8	Protection against corrosive or polluting substances	Medium protection outside and inside
6.9	Access system to the retention of the cover	The cover can only be removed with a tool
6.10	Electrical protective separation	Without electrical protective partition (divider)
6.101	Type of floor	Dry floor
6.102	1000 N	
6.103	5000 N	
	Rated Voltage	500 V ~

**Fast Connectors 2P+T**

**Description**

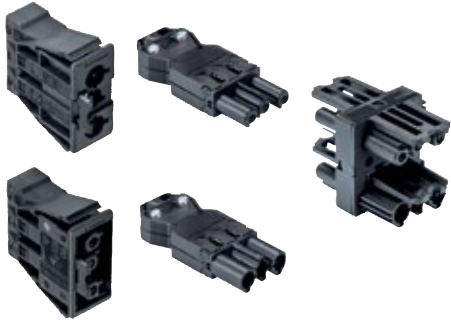


**Ref. 83150 | 83151 | 83152 | 83153 | 83154**

Fast Connectors 2P+T to supply the Desktop Workstations.  
To be used with Modules in Ref. 45980 SBR and Ref. 45981 SBR.  
Available in colours PT - Black, VM - Red.

**Technical Characteristics**

	83150 PT	83150 VM	83151 PT	83151 VM	83152 PT	83152 VM	83153 PT	83153 VM	83154 PT	83154 VM
Rated Current	20 A									
Rated Voltage	250 V ~									
Colour	Black	Red	Black	Red	Black	Red	Black	Red	Black	Red
Pole marking	L, N, PE									
Rigid section (Min. / Max.)	0,75 mm <sup>2</sup> / 2,5 mm <sup>2</sup>				0,5 mm <sup>2</sup> / 2,5 mm <sup>2</sup>				-	-
Flexible section (Min. / Max.)	0,75 mm <sup>2</sup> / 2,5 mm <sup>2</sup>				0,5 mm <sup>2</sup> / 1,5 mm <sup>2</sup>				-	-
Cable diameter (Min. / Max.)	6,5 mm / 10,5 mm				-				-	-
Number of terminals per pole	2								-	-
Connector type	Male	Male	Female	Female	Male	Male	Female	Female	-	-
Connection type	Screw				Screwless				-	-
Connection angle	Flat								-	-
Connection fixation	Snap-on									
Inputs Number	1									
Outputs Number	1								3	
Distribution type	-								H	

**Dimensions (mm)**

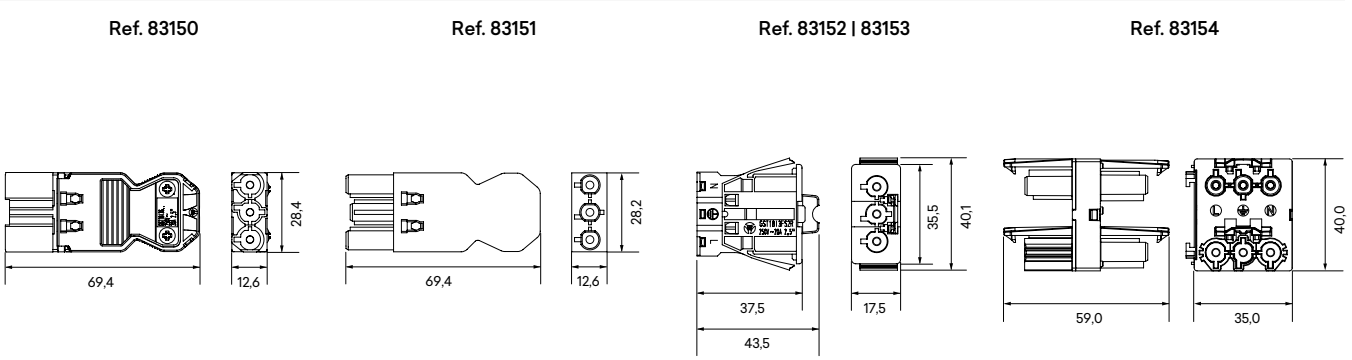





efapel.com



Serpins,  
3200-355 Serpins  
Portugal

Export  
export@efapel.com  
+351 239 970 135

SAT Technical Support Service  
sat@efapel.com  
+351 239 970 132



zastúpenie pre Slovenskú republiku:  
EMAT elektro. s.r.o.  
Pri Jelšine 3636/1  
949 01 Nitra  
mobil: +421 905 747 827  
mail: efapel@emat.sk; eshop@emat.sk

