

E EFAPEL[®]



new

USB
**Charging
Solutions**

Simplified power

Sockets with 2 USB outputs, now also C+C



Power and USB side by side. The essentials in a single mechanism.

new



USB C+C



Earth Socket (Schuko Type)
with USB C+C

LOGUS90



Earth Socket (French Type)
with USB C+C

Apolo5000



USB A+C



Earth Socket (Schuko Type)
with USB A+C

LOGUS90



Earth Socket (French Type)
with USB A+C

Apolo5000

EFAPEL's **USB sockets** combine **power and two USB outputs in the same unit**. Direct wall charging without additional adapters, keeping the socket free for other devices.

LOGUS90

energy sockets with USB



Earth Socket (Schuko Type) with USB
16 A; 250 V ~; 50/60 Hz

21137



Earth Socket (French Type) with USB
16 A; 250 V ~; 50/60 Hz

21117

cover plates



Cover Plate for Earth Socket Schuko + USB C+C
5 V ~; 3.0 A

N

90637 T



Cover Plate for Earth Socket Schuko + USB Type A and Type C
5 V ~; 3.0 A

90630 T



Cover Plate for Earth Socket French + USB C+C
5 V ~; 3.0 A

N

90657 T



Cover Plate for Earth Socket French + USB Type A and Type C
5 V ~; 3.0 A

90650 T

BR MF
GE PE AL
IS PM DU

APOLO5000

energy sockets with USB



Earth Socket (Schuko Type) with USB
16 A; 250 V ~; 50/60 Hz

21137



Earth Socket (French Type) with USB
16 A; 250 V ~; 50/60 Hz

21117

cover plates



Cover Plate for Earth Socket Schuko + USB C+C
5 V ~; 3.0 A

N

50637 T



Cover Plate for Earth Socket Schuko + USB Type A and Type C
5 V ~; 3.0 A

50630 T



Cover Plate for Earth Socket French + USB C+C
5 V ~; 3.0 A

N

50657 T





Cover Plate for Earth Socket French + USB Type A and Type C
5 V ~; 3.0 A



50650 T

BR MF
BM PM PR
GR PL CH

SCHUKO

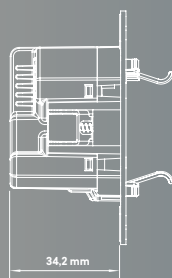

FRENCH

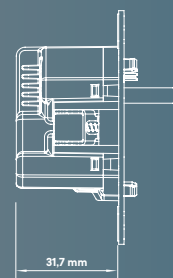

Technical Characteristics

Input voltage	250 V ~; 50/60 Hz
Input maximum current	300 mA
Maximum load	16 A
USB Output	5 V ~; 3.0 A; 15.0 W max
Consumption	0,05 mW
Operating temperature	-5 °C to +40 °C

The different connections can be used simultaneously, with the load current being distributed between them.

T - Rocker, Cover Plate or Frame | BR - White; MF - Ivory; GE - Ice; PE - Pearl; AL - Aluminium; IS - Grey; PM - Matte Black; DU - Golden; BM - Matte White; PR - Silver; GR - Graphite; PL - Platinum; CH - Champagne.

N New






















More power, faster charging

new






















USB-C *Power Delivery* chargers,
now in 45 W and 65 W.
























LOGUS90

USB chargers	ref.	cover plates	ref.	color
 USB Double Charger Type A with Output 20° 100 - 240 V ~; 50 - 60 Hz; 5 V =; 3 A	21384	 Cover Plate for USB Double Charger Type A with Output 20°	90673 T	
 USB Double Charger Type A + Type C 100 - 240 V ~; 50 - 60 Hz; 5 V =; 3 A	21381	 Cover Plate for USB Double Charger Type A + Type C	90674 T	
 USB Double Charger Type C 100 - 240 V ~; 50 - 60 Hz; 5 V =; 3 A	21382	 Cover Plate for USB Double Charger Type C	90675 T	BR MF GE PE AL IS PM DU
 USB Charger Type C Power Delivery 30 W   100 - 240 V ~; 50 - 60 Hz; 30 W	21398	 Cover Plate for USB-C Charger Power Delivery 30 W 	90668 T	
 USB Charger Type C Power Delivery 45 W   100 - 240 V ~; 50 - 60 Hz; 45 W	21397	 Cover Plate for USB-C Charger Power Delivery 45 W 	90667 T	
 USB Charger Type C Power Delivery 65 W   100 - 240 V ~; 50 - 60 Hz; 65 W	21396	 Cover Plate for USB-C Charger Power Delivery 65 W 	90666 T	

APOLO5000

USB chargers	ref.	cover plates	ref.	color
 USB Double Charger Type A with Output 20° 100 - 240 V ~; 50 - 60 Hz; 5 V =; 3 A	21384	 Cover Plate for USB Double Charger Type A with Output 20°	50673 T	
 USB Double Charger Type A + Type C 100 - 240 V ~; 50 - 60 Hz; 5 V =; 3 A	21381	 Cover Plate for USB Double Charger Type A + Type C	50674 T	
 USB Double Charger Type C 100 - 240 V ~; 50 - 60 Hz; 5 V =; 3 A	21382	 Cover Plate for USB Double Charger Type C	50675 T	BR MF BM PM PR GR PL CH
 USB Charger Type C Power Delivery 30 W   100 - 240 V ~; 50 - 60 Hz; 30 W	21398	 Cover Plate for USB-C Charger Power Delivery 30 W 	50668 T	
 USB Charger Type C Power Delivery 45 W   100 - 240 V ~; 50 - 60 Hz; 45 W	21397	 Cover Plate for USB-C Charger Power Delivery 45 W 	50667 T	
 USB Charger Type C Power Delivery 65 W   100 - 240 V ~; 50 - 60 Hz; 65 W	21396	 Cover Plate for USB-C Charger Power Delivery 65 W 	50666 T	

SIRIUS70

USB chargers	ref.	cover plates	ref.	color
 USB Double Charger Type A with Output 20° 100 - 240 V ~; 50 - 60 Hz; 5 V =; 3 A	21384	 Cover Plate for USB Double Charger Type A with Output 20°	70673 T	
 USB Double Charger Type A + Type C 100 - 240 V ~; 50 - 60 Hz; 5 V =; 3 A	21381	 Cover Plate for USB Double Charger Type A + Type C	70674 T	
 USB Double Charger Type C 100 - 240 V ~; 50 - 60 Hz; 5 V =; 3 A	21382	 Cover Plate for USB Double Charger Type C	70675 T	BR MF
 USB Charger Type C Power Delivery 30 W   100 - 240 V ~; 50 - 60 Hz; 30 W	21398	 Cover Plate for USB-C Charger Power Delivery 30 W 	70668 T	
 USB Charger Type C Power Delivery 45 W   100 - 240 V ~; 50 - 60 Hz; 45 W	21397	 Cover Plate for USB-C Charger Power Delivery 45 W 	70667 T	
 USB Charger Type C Power Delivery 65 W   100 - 240 V ~; 50 - 60 Hz; 65 W	21396	 Cover Plate for USB-C Charger Power Delivery 65 W 	70666 T	

T - Rocker, Cover Plate or Frame | BR - White; MF - Ivory; GE - Ice; PE - Pearl; AL - Aluminium; IS - Grey; PM - Matte Black; DU - Golden; BM - Matte White; PR - Silver; GR - Graphite; PL - Platinum; CH - Champagne.

 USB-C Power Delivery  New

SIZA, QUADRA AND LATINA

USB chargers

			ref.	color
	USB Double Charger Type A with Output 20° - 2 Modules 100 - 240 V ~; 50 - 60 Hz; 5 V ⚡; 3 A		45384 S	
	USB Double Charger Type A + Type C - 2 Modules 100 - 240 V ~; 50 - 60 Hz; 5 V ⚡; 3 A		45381 S	
	USB Double Charger Type C - 2 Modules 100 - 240 V ~; 50 - 60 Hz; 5 V ⚡; 3 A		45382 S	
	USB Charger Type C Power Delivery 30 W - 2 Modules		45398 S	BR BM PM AL
	USB Charger Type C Power Delivery 45 W - 2 Modules		45397 S	
	USB Charger Type C Power Delivery 65 W - 2 Modules		45396 S	
	USB Charger Type A - 1 Module 100 - 240 V ~; 50 - 60 Hz; 5 V ⚡; 2.4 A		45383 S	BR BM PM AL MF GE PE IS DU PR GR PL CH
	USB Charger Type C - 1 Module 100 - 240 V ~; 50 - 60 Hz; 5 V ⚡; 1.5 A		45387 S	

Fast charging, for more demanding solutions

USB-C Power Delivery chargers offer power outputs of **30 W**, **45 W** and **65 W**, ensuring fast and stable charging.



Double Charger
USB A+C



Double Charger
USB C




**USB-C Charger
Power Delivery**




Double Charger
USB C

mec21

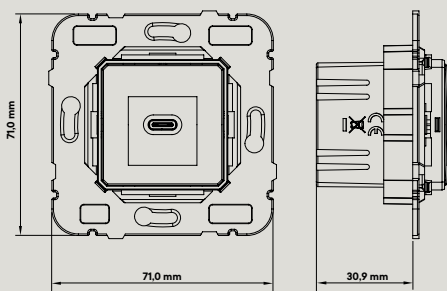

mecQ45

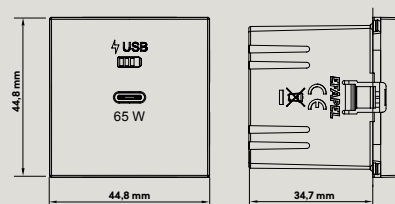

S - Semi-assembled | BR - White; MF - Ivory; GE - Ice; PE - Pearl; AL - Aluminium; IS - Grey; PM - Matte Black; DU - Golden; BM - Matte White; PR - Silver; GR - Graphite; PL - Platinum; CH - Champagne.

USB-C Power Delivery New



Serpins,
3200-355 Serpins
Portugal

Portugal
+351 239 970 130
efapel@efapel.com

Export
+351 239 970 135
export@efapel.com

SAT Technical Support Service
+351 239 970 132
sat@efapel.com

efapel.com



zastúpenie pre Slovenskú republiku:

EMAT elektro. s.r.o.

Pri Jelšine 3636/1

949 01 Nitra

mobil: +421 905 747 827

mail: efapel@emat.sk; eshop@emat.sk

